


# KELOX

## KM130 KELOX plus pipe - 9mm 25x2,5

7521251

### Areas of application

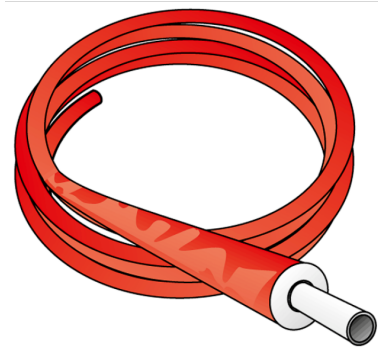

KELOX multilayer pipe conforming to ÖNORM EN ISO 21003; oxygen- and water vapour-tight 5-layer multilayer pipe made of PE-RT/Al/ PE-RT; 9 mm soft foam insulation applied at the factory; 9mm closed cell soft plastic insulation protective sleeve made of viscoplastic PE foil

Classification of operating conditions according to ÖNORM EN ISO 21003

Sanitary application - Class 2: 70°C - tmax 80°C/10 bar

Radiator connection - Class 5: 80°C - tmax 90°C/10 bar

Insulation thickness: 9mm

Colour: red

Supplied in coils



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

## Approvals:



# Specifications

## Article information


|                  |       |
|------------------|-------|
| color            | White |
| colour isolation | Red   |
| flexible         | 1     |
| isolation        | 1     |

## Technical properties

|                                    |           |
|------------------------------------|-----------|
| maximum working pressure at 20 ° C | 10        |
| thick thermal insulation           | 9 mm      |
| pipe weight                        | 0.31      |
| pipe contents                      | 0,314 l/m |
| lambda pipe                        | 0.45      |

## Product information

|                     |                       |
|---------------------|-----------------------|
| VPE1                | 25 ROL                |
| VPE2                | 375 PAL               |
| L                   | 25 m                  |
| weight              | 0,31 KGM              |
| text                | KELOX plus pipe - 9mm |
| INTRNR              | 39173900              |
| main material group | KELOX                 |
| material group      | KELOX isolierte pipes |
| code                | KM130                 |

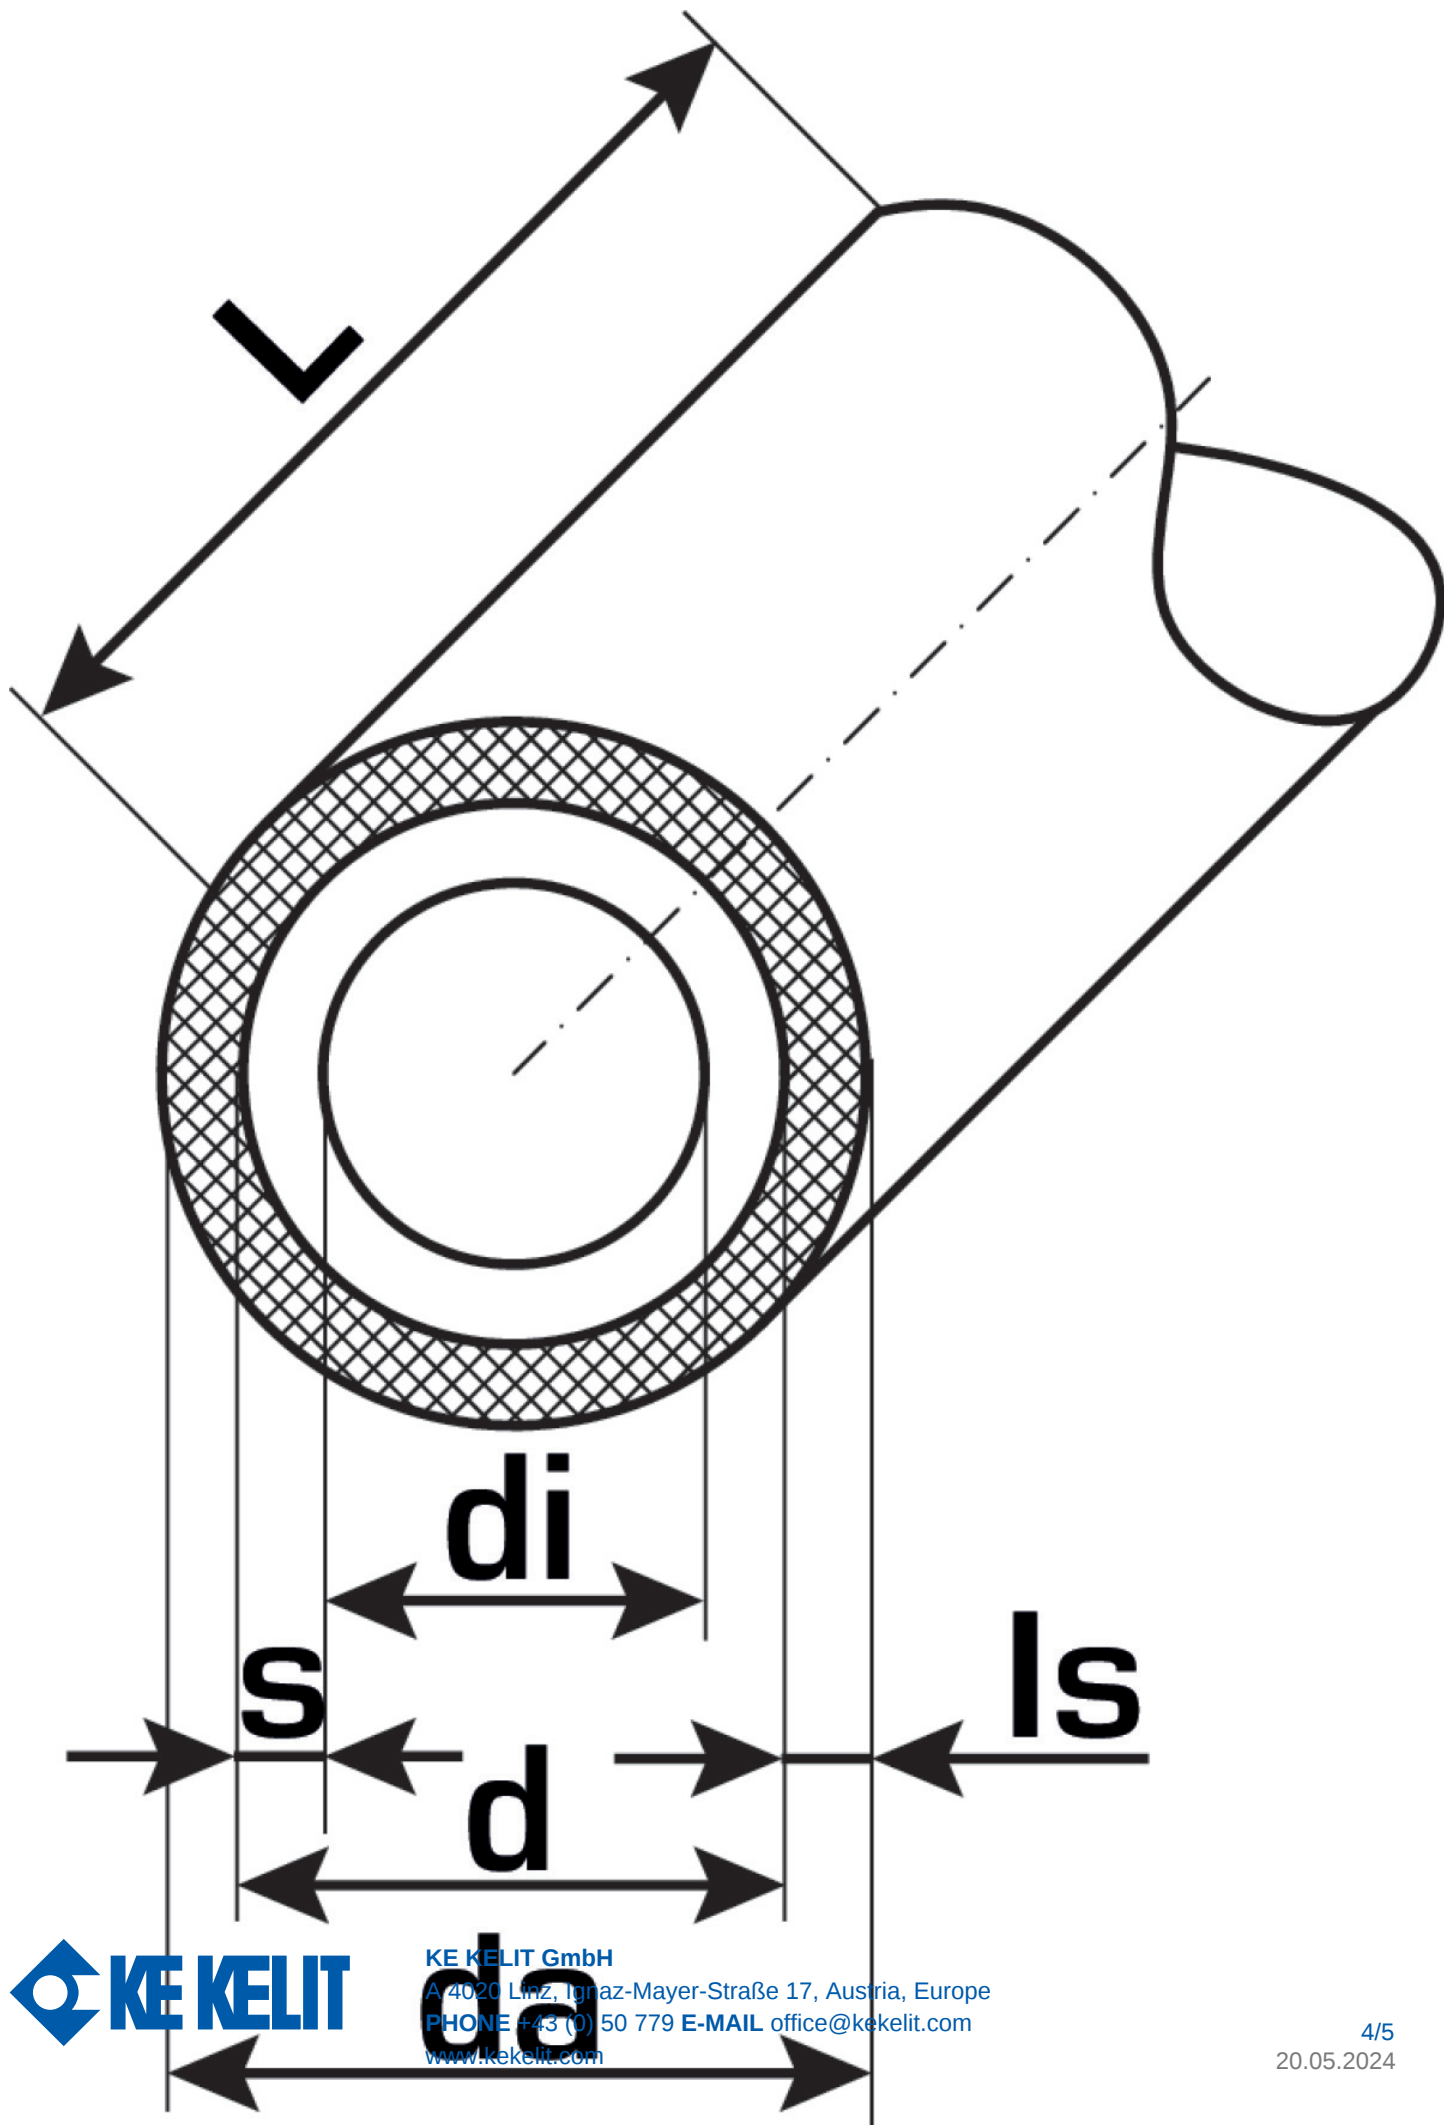

| Art. No | label  | pipe contents l/m |
|---------|--------|-------------------|
| 7521251 | 25x2,5 | 0,314             |