


# KELOX

## KMU440 KELOX-ULTRAX tee 20/16/16

71110DBB

### Areas of application

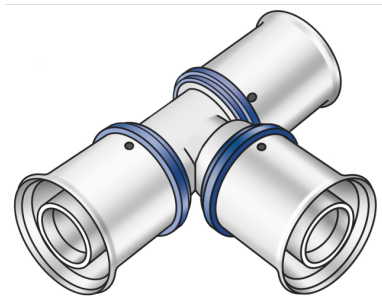

Press tee equal or reduced, made of non-porous metallized brass, incl. support sleeves with O-rings and steel or stainless steel press-fit sleeves, "leak before pressed"

### Approvals:



# Specifications

## Article information


|               |                 |
|---------------|-----------------|
| port 1        | Pressing socket |
| port 2        | Pressing socket |
| port 3        | Pressing socket |
| execution     | Tee piece       |
| angle         | 90              |
| press contour | U               |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                             |
|---------------------|-----------------------------|
| VPE1                | 10 SA1                      |
| VPE2                | 100 KT1                     |
| weight              | 0,117 KGM                   |
| text                | KELOX-ULTRAX tee            |
| INTRNR              | 74122000                    |
| main material group | KELOX                       |
| material group      | KELOX-ULTRAX metal fittings |
| code                | KMU440                      |

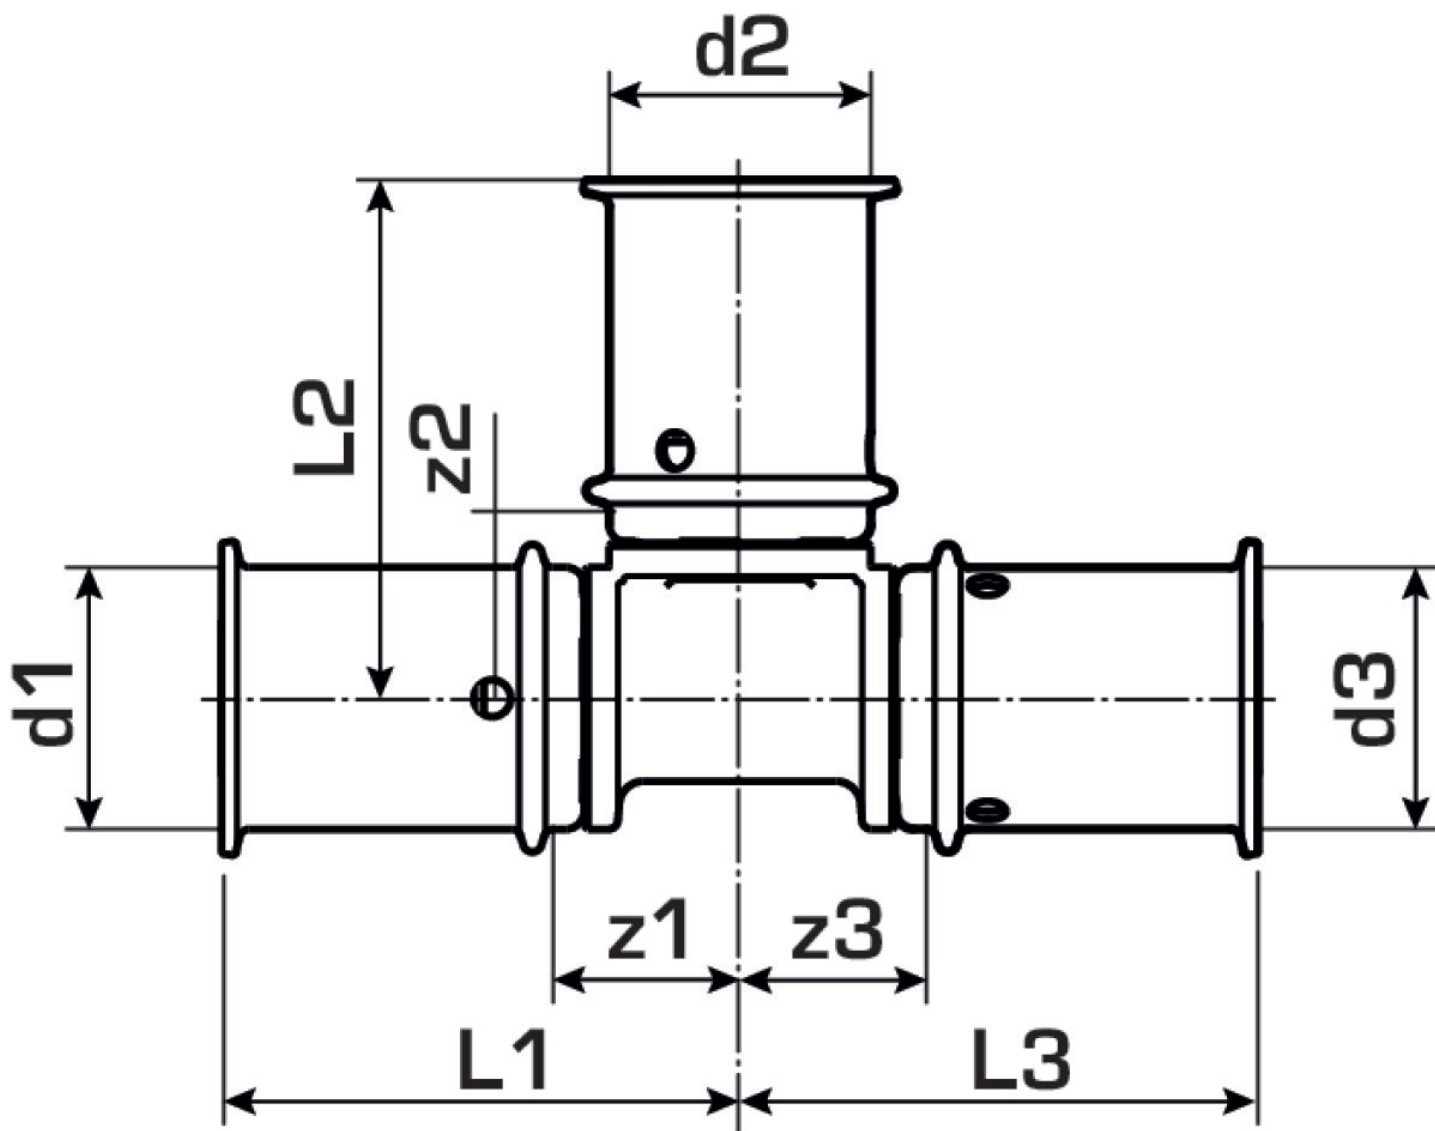

| Art. No  | label    | d1 mm | d2 mm | d3 mm | L1 | L2 | L3 | z1 mm | z2   | z3 mm |
|----------|----------|-------|-------|-------|----|----|----|-------|------|-------|
| 71110DBE | 20/16/16 | 20    | 16    | 16    | 42 | 39 | 39 | 16    | 14.5 | 16    |