


# KELOX

## KMU440 KELOX-ULTRAX tee 75/75/75

71110JJJ

### Areas of application

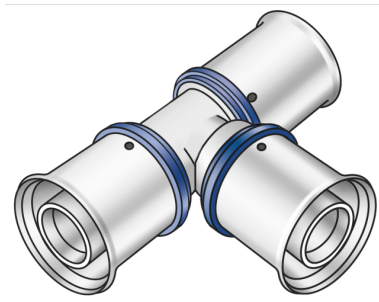

Press tee equal or reduced, made of non-porous metallized brass, incl. support sleeves with O-rings and steel or stainless steel press-fit sleeves, "leak before pressed"

### Approvals:



# Specifications

## Article information


|               |                 |
|---------------|-----------------|
| port 1        | Pressing socket |
| port 2        | Pressing socket |
| port 3        | Pressing socket |
| execution     | Tee piece       |
| angle         | 90              |
| press contour | U               |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                             |
|---------------------|-----------------------------|
| VPE1                | 1 SA1                       |
| VPE2                | 2 KT1                       |
| weight              | 2,42 KGM                    |
| text                | KELOX-ULTRAX tee            |
| INTRNR              | 74122000                    |
| main material group | KELOX                       |
| material group      | KELOX-ULTRAX metal fittings |
| code                | KMU440                      |

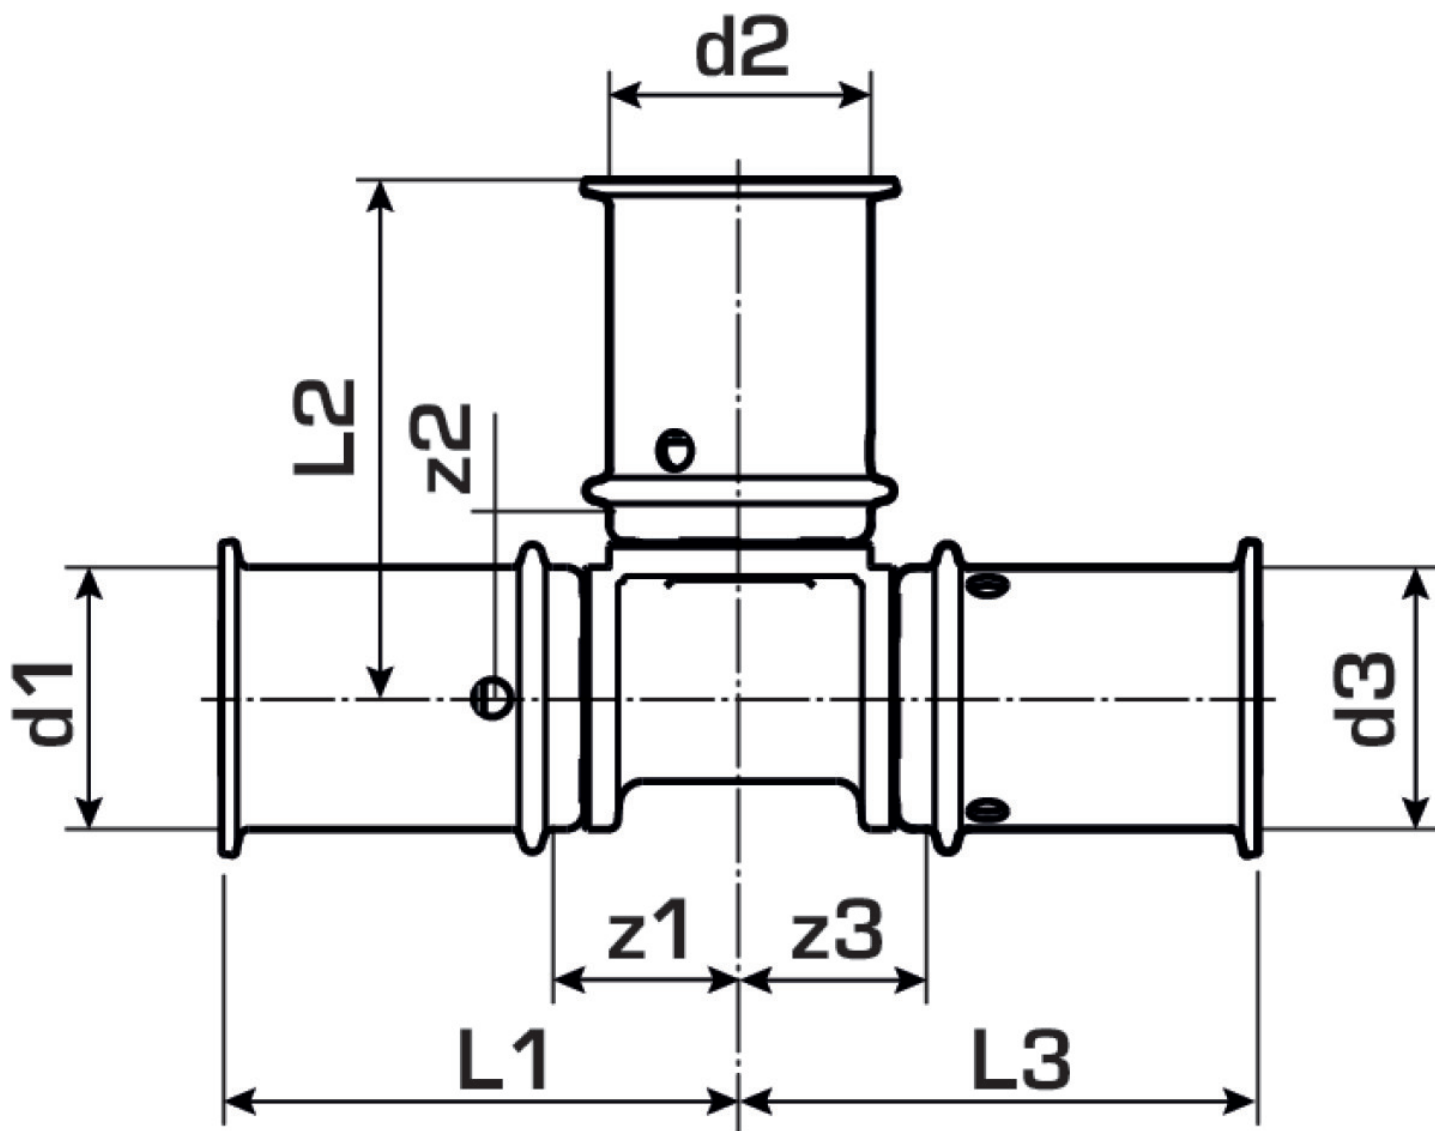

| Art. No  | label    | d1 | d2 | d3 | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|----------|----------|----|----|----|-------|-------|-------|-------|-------|-------|
| 71110JJJ | 75/75/75 | 75 | 75 | 75 | 117   | 117   | 117   | 54    | 54    | 54    |