


KELOX

KMP477 KELOX-PROTEC double U wall bracket female 16x1/2"

73254B2B

Areas of application

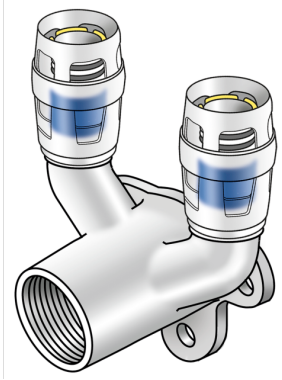

Plug-fit double-U wall bracket with female thread made from non-porous metallized brass; including support sleeves, O-rings, withdrawal barriers and a protector ring as an insertion locking device

Overall height:

1/2" - 46mm

DO NOT screw in threaded pipes and cast iron fittings!

Approvals:



Specifications

Article information


port 1	Plug-in
port 2	Plug-in
port 3	Female thread metric
execution	Miscellaneous
design	Continuously right-angled

Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

Product information

VPE1	10 SA1
VPE2	50 KT1
weight	0,254 KGM
text	KELOX-PROTEC double U wall bracket female
INTRNR	74122000
main material group	KELOX
material group	KELOX-PROtec pushfittings
code	KMP477

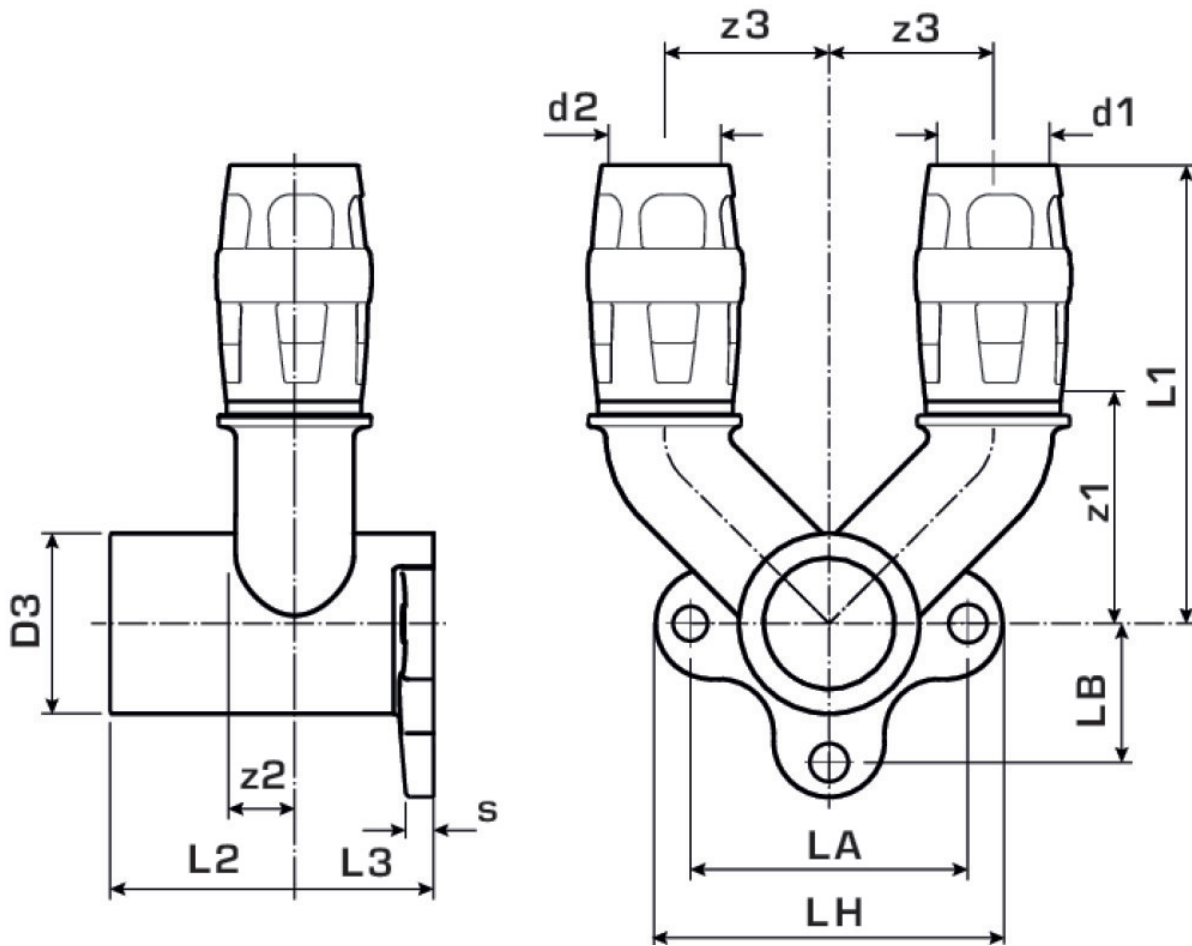

Art. No	label	d3	d1 mm	d2 mm	d3	d1 mm	L1	L2	L3 mm	z1	z2	z3	z1 mm	z2	z3 mm
73254	16x1½	1½" (15)	16	16	26.5	16	66	26	19.5	31.5	31.5	9	34	9	25