


# KELOX

## KWP410 KELOX-PROTEC PPSU coupling 25/25

73600EE0

### Areas of application

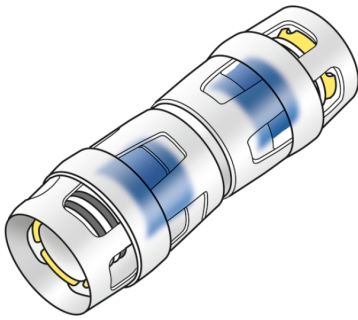

?Plug-in coupling equal or reduced, made of PPSU, incl. support sleeves, O-rings, withdrawal barriers and a protector ring as an insertion locking device

### Approvals:



# Specifications

## Article information


|           |               |
|-----------|---------------|
| port 1    | Plug-in       |
| port 2    | Plug-in       |
| execution | Miscellaneous |
| design    | straight      |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 10 bar |
|------------------------------------|--------|

## Product information

|                     |                                |
|---------------------|--------------------------------|
| VPE1                | 10 SA1                         |
| VPE2                | 90 KT1                         |
| weight              | 0,038 KGM                      |
| text                | KELOX-PROTEC PPSU coupling     |
| INTRNR              | 39174000                       |
| main material group | KELOX                          |
| material group      | KELOX-PROtec-PPSU pushfittings |
| code                | KWP410                         |

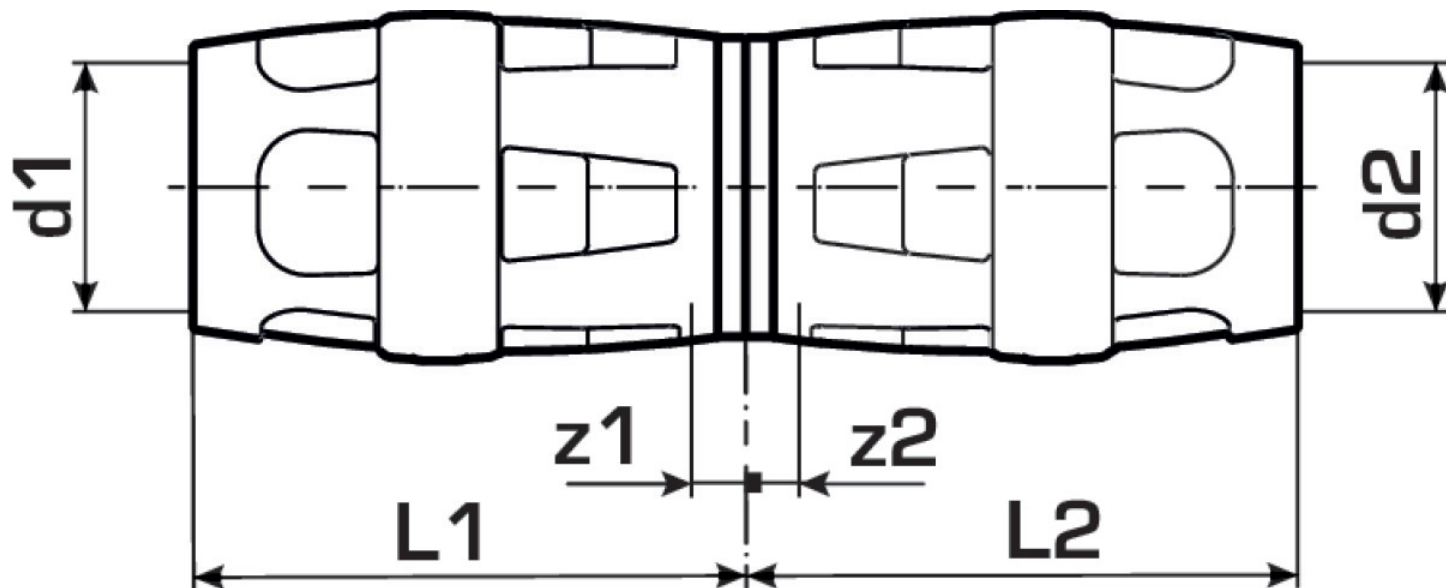

| Art. No  | label | d1 mm | L1 mm | L2 mm | z1 mm | z2 mm |
|----------|-------|-------|-------|-------|-------|-------|
| 73600EE0 | 25/25 | 25    | 44    | 44    | 6.6   | 6.6   |