


# COPPER FIX

## COF447 Copper press-tee with branch female 35x1/2"

52740F02

### Areas of application

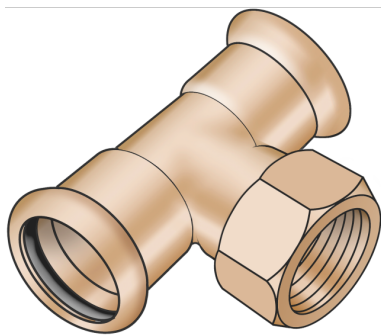

Press-fit tee with threaded branch female made of red brass, incl. EPDM sealing components, "leak before pressed"

Press contour: M

### Approvals:



# Specifications

## Article information


|               |                            |
|---------------|----------------------------|
| port 1        | Pressmuffe                 |
| port 2        | Innengewinde konisch (NPT) |
| port 3        | Pressmuffe                 |
| execution     | T-Stück                    |
| angle         | 90 °                       |
| press contour | M                          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                                     |
|---------------------|-------------------------------------|
| VPE1                | 5 SA1                               |
| VPE2                | 15 KT1                              |
| weight              | 0,227 KGM                           |
| text                | Copper press-tee with branch female |
| INTRNR              | 74122000                            |
| main material group | COPPERFIX                           |
| material group      | KUPFER pressfittings                |
| code                | COF447                              |

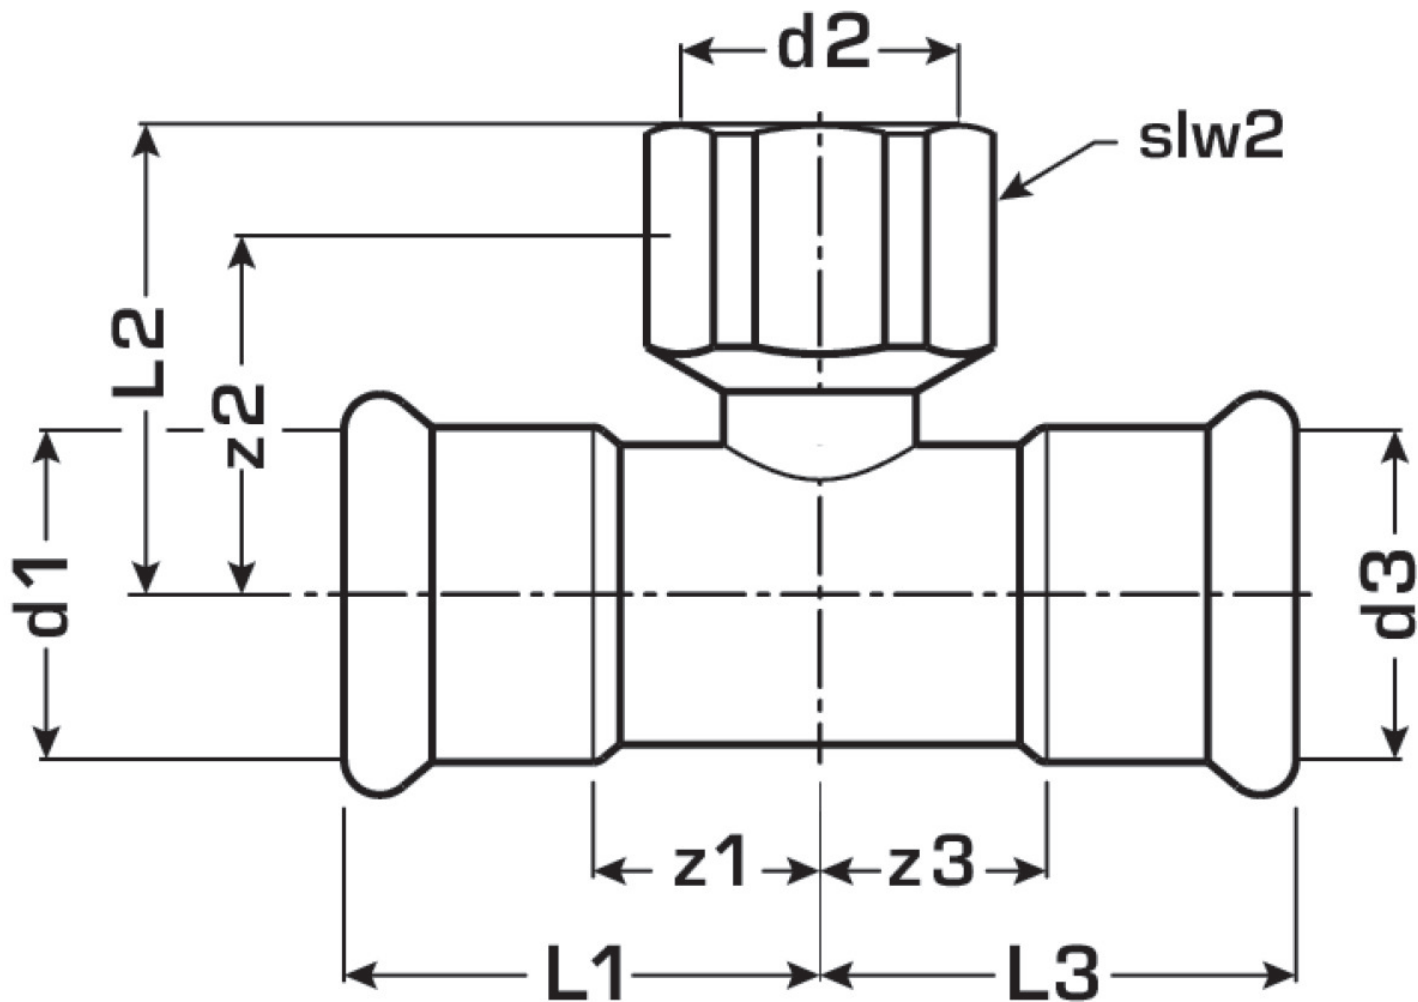

| Art. No | label   | d2            | d1 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm | slw1 mm |
|---------|---------|---------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 52740F0 | 35x1/2" | 1/2 Zoll (15) | 35    | 35    | 50    | 34    | 50    | 24    | 19    | 24    | 26      |