


CLIMATE FIX

KC150B16 CLIMATEFIX near surface - thermal activated concrete - 150 150/16

6352150

Areas of application

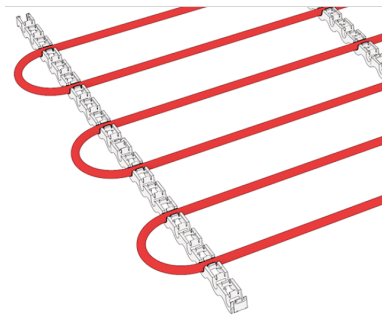

?Near-surface cooling and heating ceiling module for installation on the ceiling formwork. Composed of a factory-produced PVC-free pipe register, pipe spacing 150mm, made of ULTRA PE-RT plastic pipes d16x2mm, oxygen-tight conforming to ÖNORM EN 21003, pre-installed on the KC610B clamping rail. The fire performance of in-situ concrete ceilings with integrated, near-surface arranged pipe registers has been proven in a fire test conforming to EN 1363-1/EN 1365-2 to comply with fire-resistance class REI 90.

Module size freely selectable up to max. 6m² with a max. side length of 6m

Pipeline spacing: 150mm

Pipeline length: approx. 7m/m²



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Application area - pipe: tmax 70°C/6 bar

The modules are manufactured for the respective project - NO return possible!



KE KELIT GmbH


A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information	
VPE1	1 M2
weight	1,3 KGM
text	CLIMATEFIX near surface - thermal activated concrete - 150
INTRNR	73142090
main material group	CLIMATEFIX
material group	CLIMATEFIX module
code	KC150B16

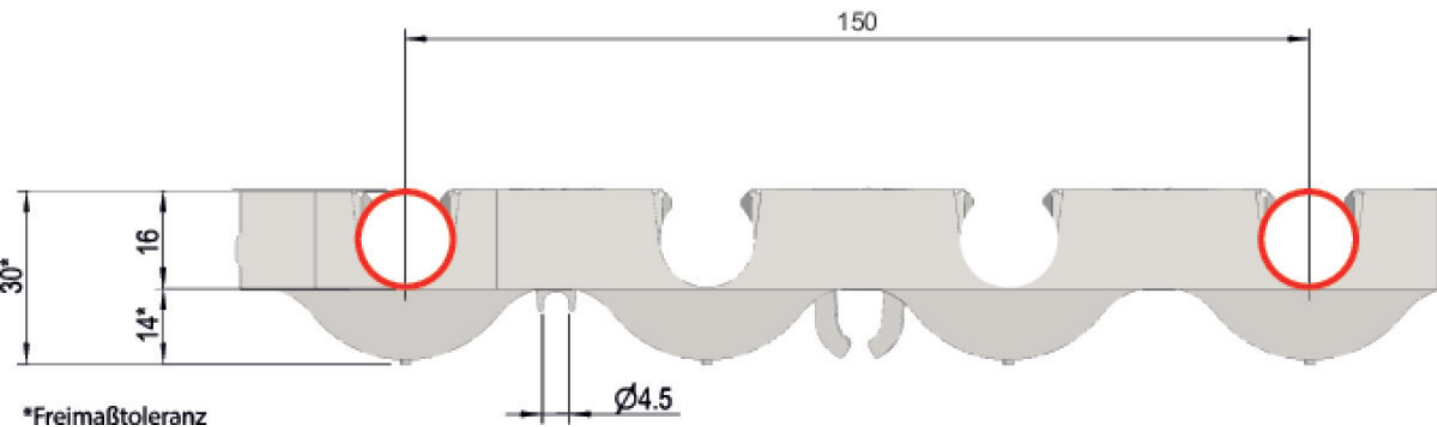

Art. No	label
6352150	150/16