


ULTRA PE-RT velcro pipe type 2 16x2

7011613

Areas of application

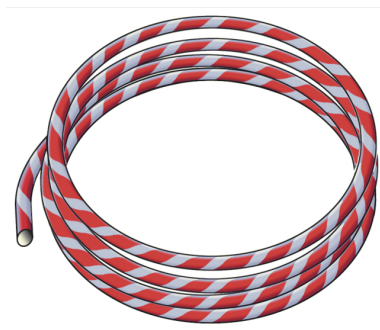

ULTRA PE-RT Velcro tube Type 2 in accordance with ÖNORM EN ISO 22391, EVOH oxygen barrier protected by PE-RT coating in accordance with DIN 4726, incl. wrapped Velcro strips for direct attachment on the KM636 and KM636K KELOX FB Velcro plate and film without additional fasteners. KM screw connections, KMP, KWP, KMU and KWX fittings can be used for connection. Classification of operating conditions as per ÖNORM EN ISO 22391

Underfloor heating - Class 4: 60 °C - tmax 70 °C/6 bar

Colour: red

Supplied in coils

Approvals:



Specifications

Article information

color	red
flexible	x
trade length	300 m

Technical properties

maximum working pressure at 20 ° C	6 bar
pipe weight	0.082 kg/m
pipe contents	0.113 l/m
wall rawness	0.007 mm
expansion coefficient	0.025 mm/(m.K)

Product information

text	ULTRA PE-RT velcro pipe type 2
------	--------------------------------





Art. No	label	d1 mm	pipe contents l/m	s mm
7011613	16x2	16	0.113	2



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com