


KELOX_{FB}

KELOX FB stapling panel - S 30/2 roll 6.5kN

6060730

Areas of application

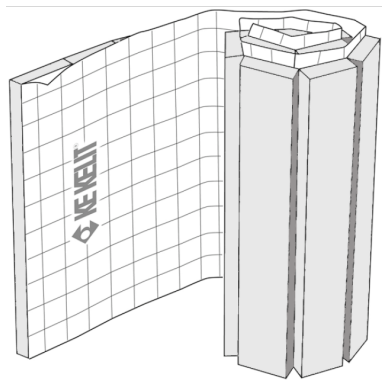

Expanded polystyrene according to ÖNORM B 6000, HFC- and CFC-free, laminated HDPE fabric with PE coating, incl. adhesive overlap edge for stapling and fastening the KELOX-ULTRAX FB- and ULTRA PE-RT pipes using KM611 staples

Load-bearing capacity of roll/folding panel: max. 6.5 kN/m² - EPS-T 650 - Dynamic rigidity: Load-bearing capacity of roll/folding panel: max. 10 kN/m² - EPS-T 1000 - Dynamic rigidity: Load-bearing capacity of folding roll max. 6.5 kN/m² - EPS-T 040 - Dynamic rigidity: Footfall sound attenuation according to ÖNORM B 8115-4 with screeding mass of 100 kg/m²

30/2 - 6.5kN - Footfall sound attenuation: 28 dB - Lambda value: 0.040 W/mK

30/2 - 10kN - Footfall sound attenuation 27 dB - Lambda value: 0.038 W/mK

Water vapour diffusion resistance: 250,000 My

Compressibility 2mm



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Coiled product: 10x1m

Folding roll: 10x1m

ATTENTION: Protect from direct sunlight, do not store outdoors!

Max. storage temperature 40°C!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Technical properties	
----------------------	--

suitable for pipe diameter	16-20
----------------------------	-------

Product information	
---------------------	--

text	KELOX FB stapling panel - S
------	-----------------------------

Art. No	label
6060730	30/2 roll 6.5kN

