


# KELOX<sub>FB</sub>

KELOX fixed value regulator set Res. feed line  
barbed cross connection 1"

7952320

## Areas of application

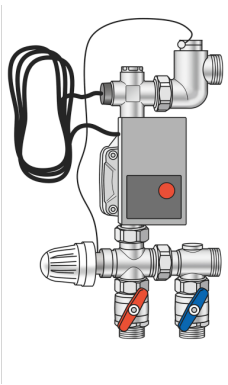

KELOX FB fixed-value regulator set for temperature regulation of individual underfloor heating circuits in systems with a temperature level of radiator heating systems (e.g. 70/55°C). Functional principle is according to thermal injection control as a fixed-value regulator; system is connected directly to the manifold. If all the underfloor heating circuits are to be closed on an automated basis, pump must be secured with pump logic (e.g. KM691 KELOX connecting unit) to secure switch-off of the pump. The primary feed line is connected to the return line bar with the primary return line being connected to the primary feed line. Pay attention to hydraulic balancing in the connecting lines!

Minimum depth of manifold cabinet 110mm

Consisting of:

Wilo-Yonos-Para 15/6 high-efficiency pump, temperature monitor, three-way valve, 2 connection ball valves with 3/4" male thread, all connection fittings on the manifold installed ready to plug in.  
Suitable for all KELOX FB 1" manifolds; additional width required is at least 220mm!

Area of use: tmax. 80°C/6bar



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)


[www.kekelit.com](http://www.kekelit.com)

# Specifications

Product information

text

KELOX fixed value regulator set

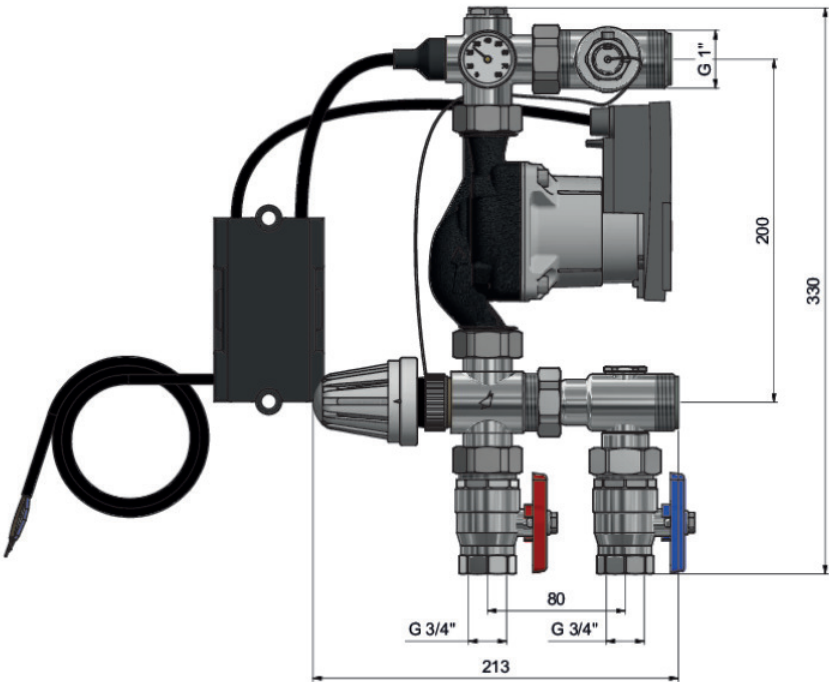

| Art. No | label                                     |
|---------|---|
| 7952320 | Res. feed line barbed cross connection 1" |