


KELOX_{FB}

KELOX 24V wireless receiver 370x52x75mm

5881360

Areas of application

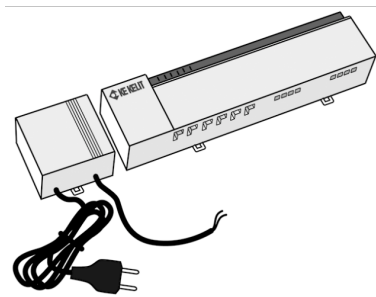

For connecting a maximum of 8 room thermostats, possible to connect up to 12 (24V) thermal motors, potential-free contact for a changeover signal, as well as pump logic for switching a 230 V/200 W circulation pump, up to 7 KM695 or KM695S can be connected via wireless and/or syBUS. Integration into a network by means of an RJ45 Ethernet port is possible, operation by means of a Web interface or smartphone app (a network connection is necessary) or via a KM694K room unit. Integration by means of an XML interface into a centralised instrumentation and control system; maximum distance from wireless room thermostat 3 walls and 1 storey ceiling

Connection voltage: 230V AC 50 Hz

Wireless frequency: 868 MHz

Size: 370x52x75mm

Colour: Light grey (RAL 7035)

ATTENTION Take into account space requirement in manifold cabinet!
Only in conjunction with KM694 or KM694K wireless room thermostats!
Only in conjunction with KM596 KELOX 24V thermal motor!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information	
text	KELOX 24V wireless receiver
Art. No	label
5881360	370x52x75mm

