


# KELOX<sub>FB</sub>

KMP590E KELOX-PROTEC FB stainless steel push fitting manifold 3 L: 275mm

73171030

## Areas of application

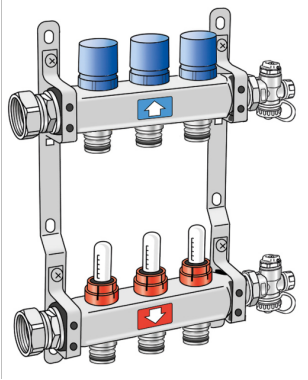

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnet for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including small soundproofed steel consoles


Application area: tmax. 70°C/6 bar

ATTENTION – WITHOUT KMP552 PROTEC quick-push coupling!

# Specifications

| Product information |                                                       |
|---------------------|-------------------------------------------------------|
| text                | KELOX-PROTEC FB stainless steel push fitting manifold |
| main material group | KELOX                                                 |
| material group      | KELOX FB-accessories                                  |
| code                | KMP590E                                               |



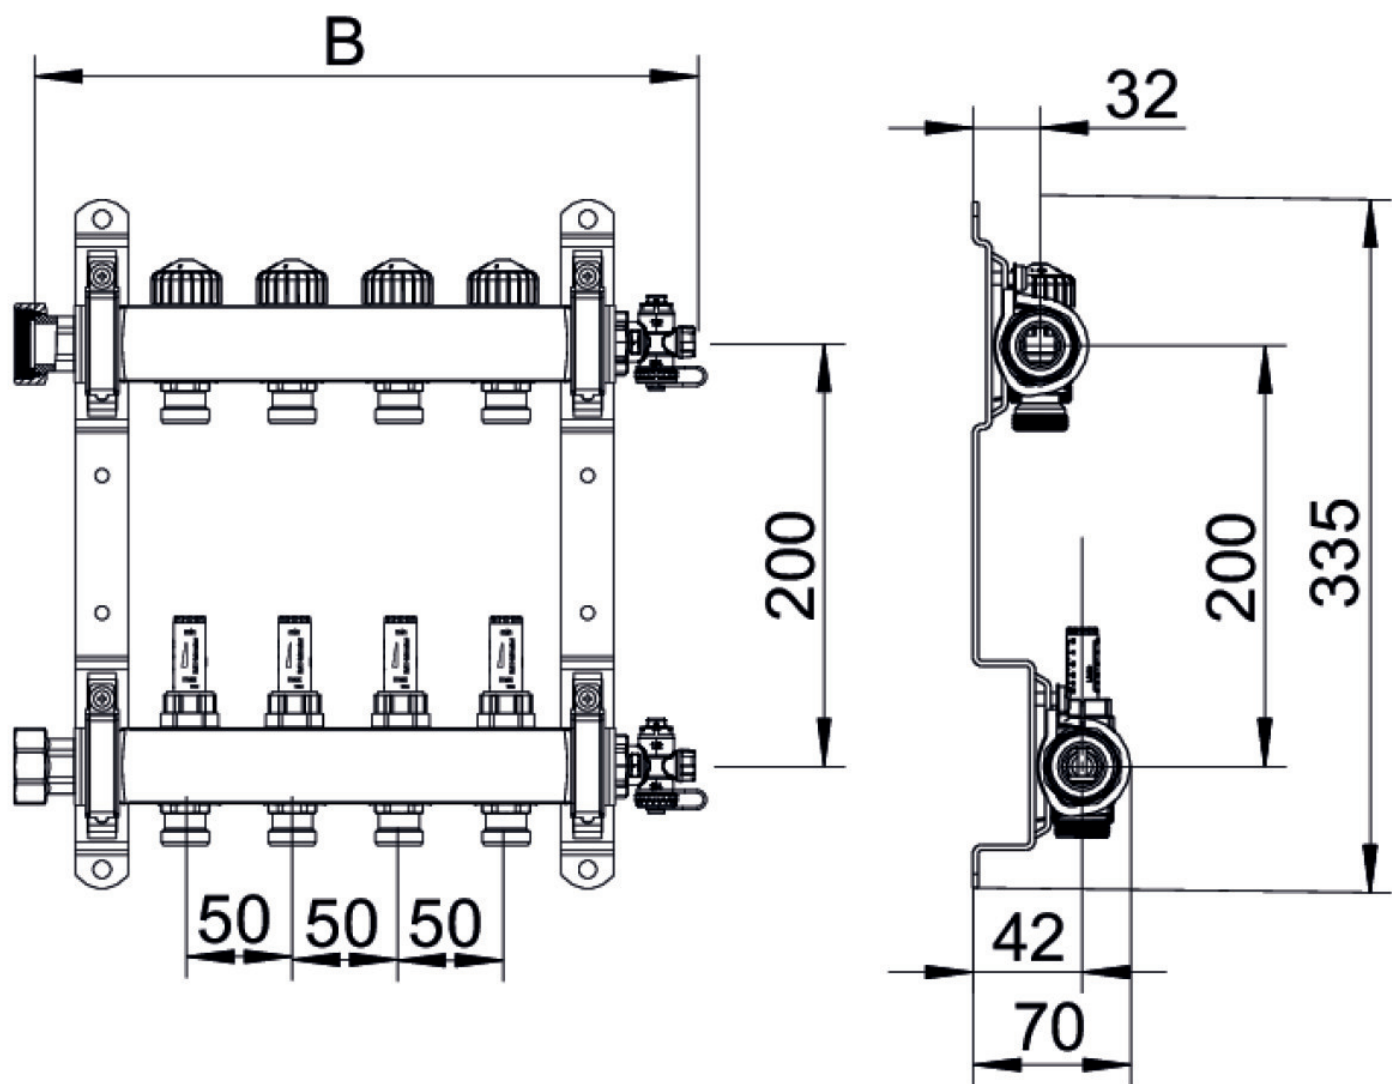

| Art. No  | label      | t  | t   | h   |
|----------|------------|----|-----|-----|
| 73171030 | 3 L: 275mm | 80 | 275 | 305 |