

KELEN

KE33 KELEN PP-RCT tee with branch female 20x1/2"BF

2633601

Areas of application



KELEN PP-RCT Polyfusion welding fitting for connecting pipes with fittings made of the same material (no reduction of internal diameter), with injected female thread made of dezincification-resistant brass, non-porous metal plating, threads conform to ÖNORM EN 10226

System parts marked with an "S" are produced with a wrench attachment connection

System parts marked with "BF" are produced with a fastening flange

Do NOT connect to threaded pipes or to cast iron fittings!

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Article information


| | |
|-----------|--|
| port 1 | Plastic welded sleeve |
| port 2 | Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1) |
| port 3 | Plastic welded sleeve |
| execution | T-piece |
| angle | 90 ° |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 20 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|-------------------------------------|
| VPE1 | 10,00 SA1 |
| VPE2 | 60,00 KT1 |
| VPE3 | 240,00 KT2 |
| VPE4 | 5760,00 PAL |
| weight | 0,0960 KGM |
| text | KELEN PP-RCT tee with branch female |
| INTRNR | 39174000 |
| main material group | KELEN |
| material group | KELEN metal fittings |
| code | KE33 |

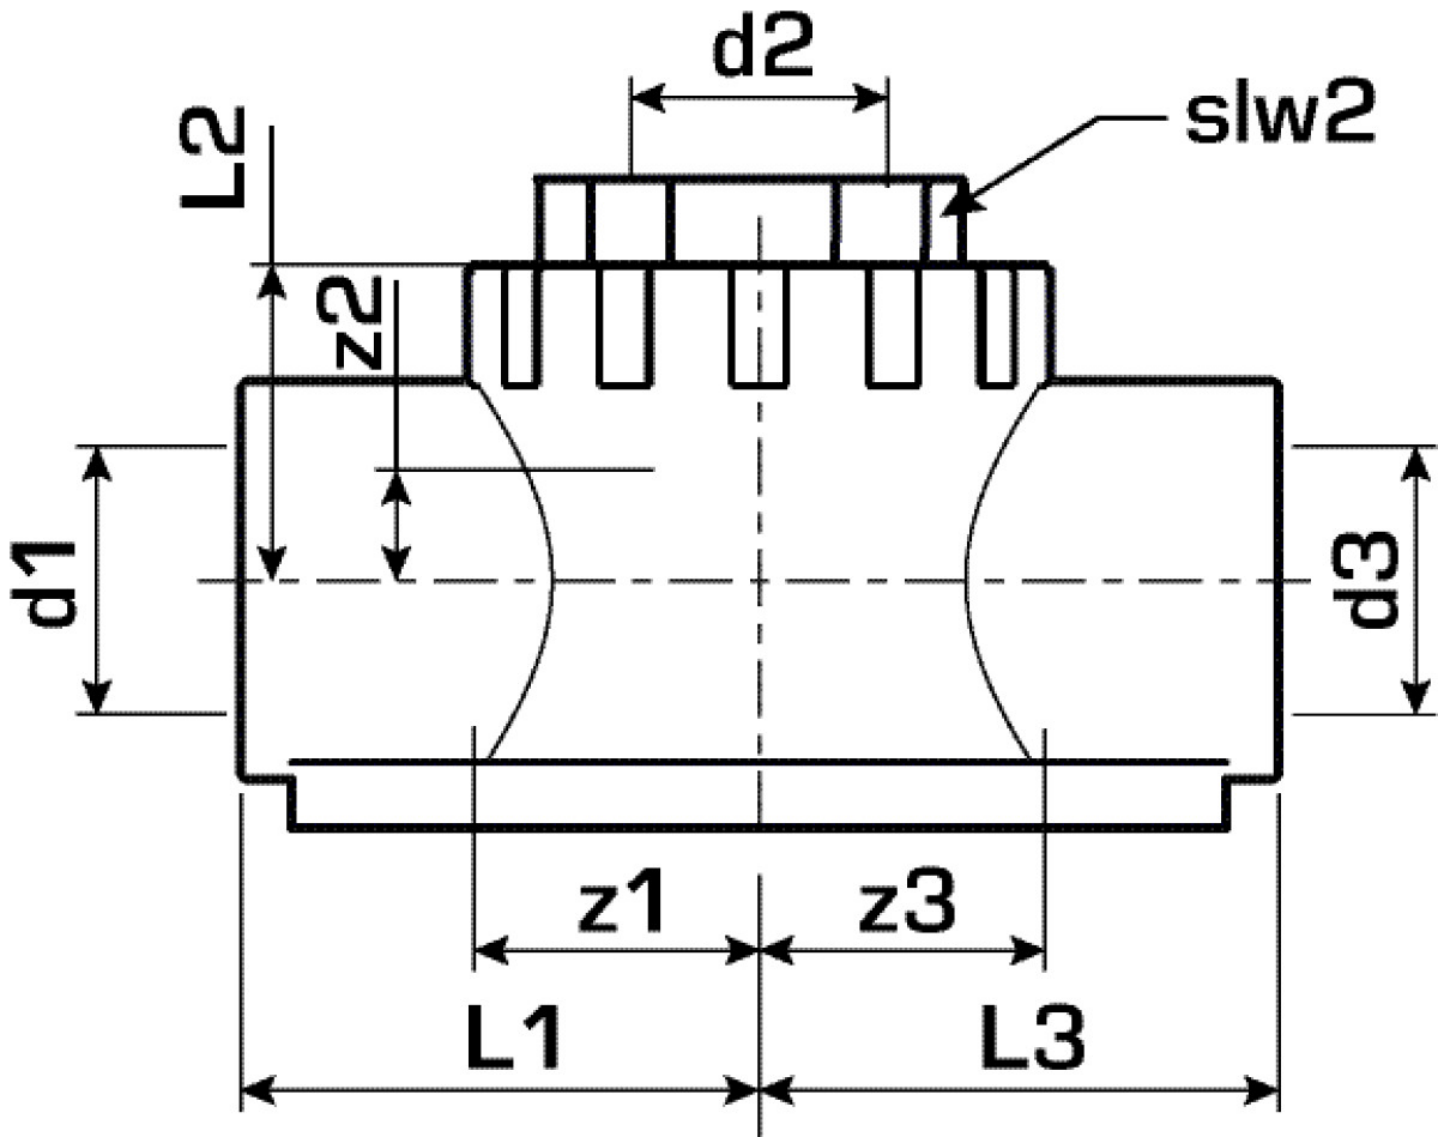

| Art. No | label | d2 | d1 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|---------|-----------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 2633601 | 20x1/2"BF | 1/2 inch (15) | 20 | 20 | 28 | 34 | 28 | 12 | 19 | 12 |