KMP440X KELOX-PROTEC CLIX tee 25/16/16

730110EBB

Areas of application

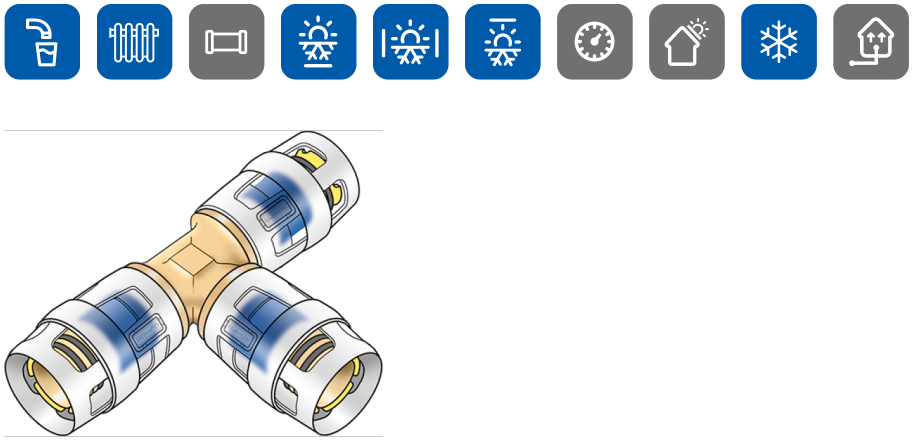

Push tee equal or reduced, made of dezincification-resistant brass (DZR), incl. push-fit sleeve made of transparent polyamide with insertion click noise, as well as haptic and optical insertion indicator, O-rings, withdrawal barriers and a protector ring as an insertion locking device.

Approvals:

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com

Specifications

Article information	
port 1	Einsteck (Push-Fitting)
port 2	insert (push-fitting)
port 3	insert (push-fitting)
execution	T-piece
angle	90 °

Technical properties	
maximum working pressure at 20 ° C	10 bar

Product information	
VPE1	4,00 SA1
VPE2	48,00 KT1
weight	0,1650 KGM
text	KELOX-PROTEC CLIX tee
INTRNR	74122000
main material group	KELOX
material group	KELOX-PROtec pushfittings
code	KMP440X

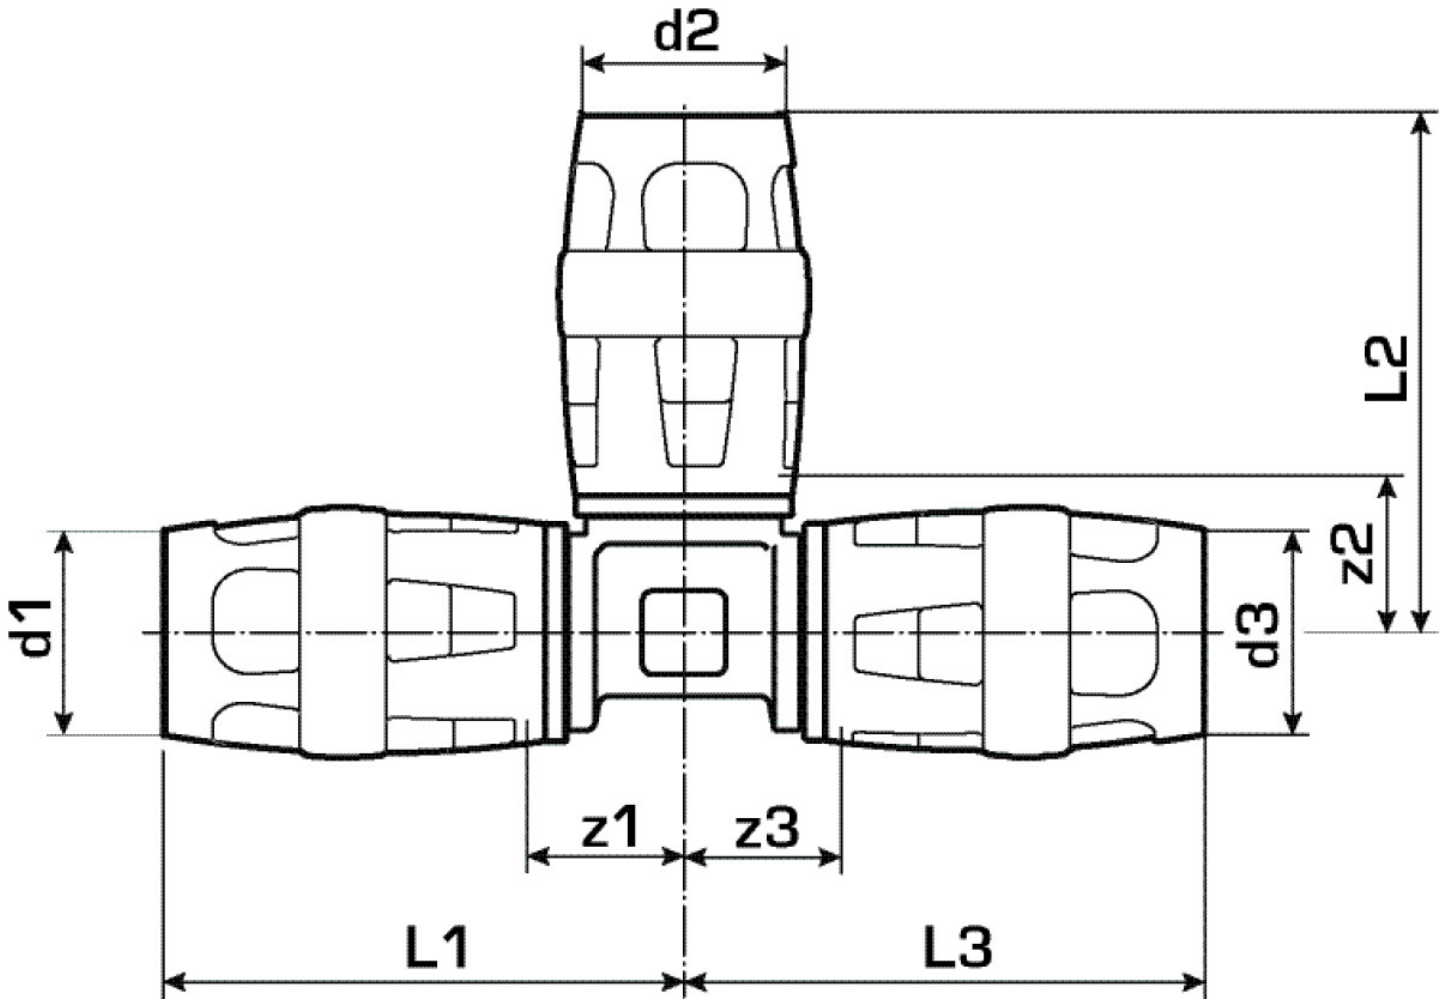

Art. No	label	d1 mm	d2 mm	d3 mm	L1 mm	L2 mm	L3 mm	z1 mm	z2 mm	z3 mm
730110EE	25/16/16	25	16	16	59	52	52	20	19	19

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com