


KELOX

KMW450 KELOX-ULTRAX-W adapter with male thread 25x3/4"

71402E04

Areas of application

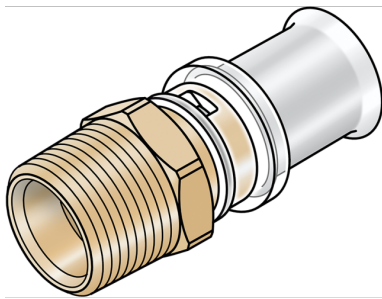

?Zeta value-optimised press-fit adapter with male thread for sealing, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

Approvals:



Specifications

Article information


port 1	Pressmuffe
port 2	Außengewinde zylindrisch BSPP (ISO 228-1)
design	gerade
press contour	U

Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

Product information

VPE1	5,00 SA1
VPE2	40,00 KT1
VPE3	2400,00 PAL
weight	0,1070 KGM
text	KELOX-ULTRAX-W adapter with male thread
INTRNR	74122000
main material group	KELOX
code	KMW450

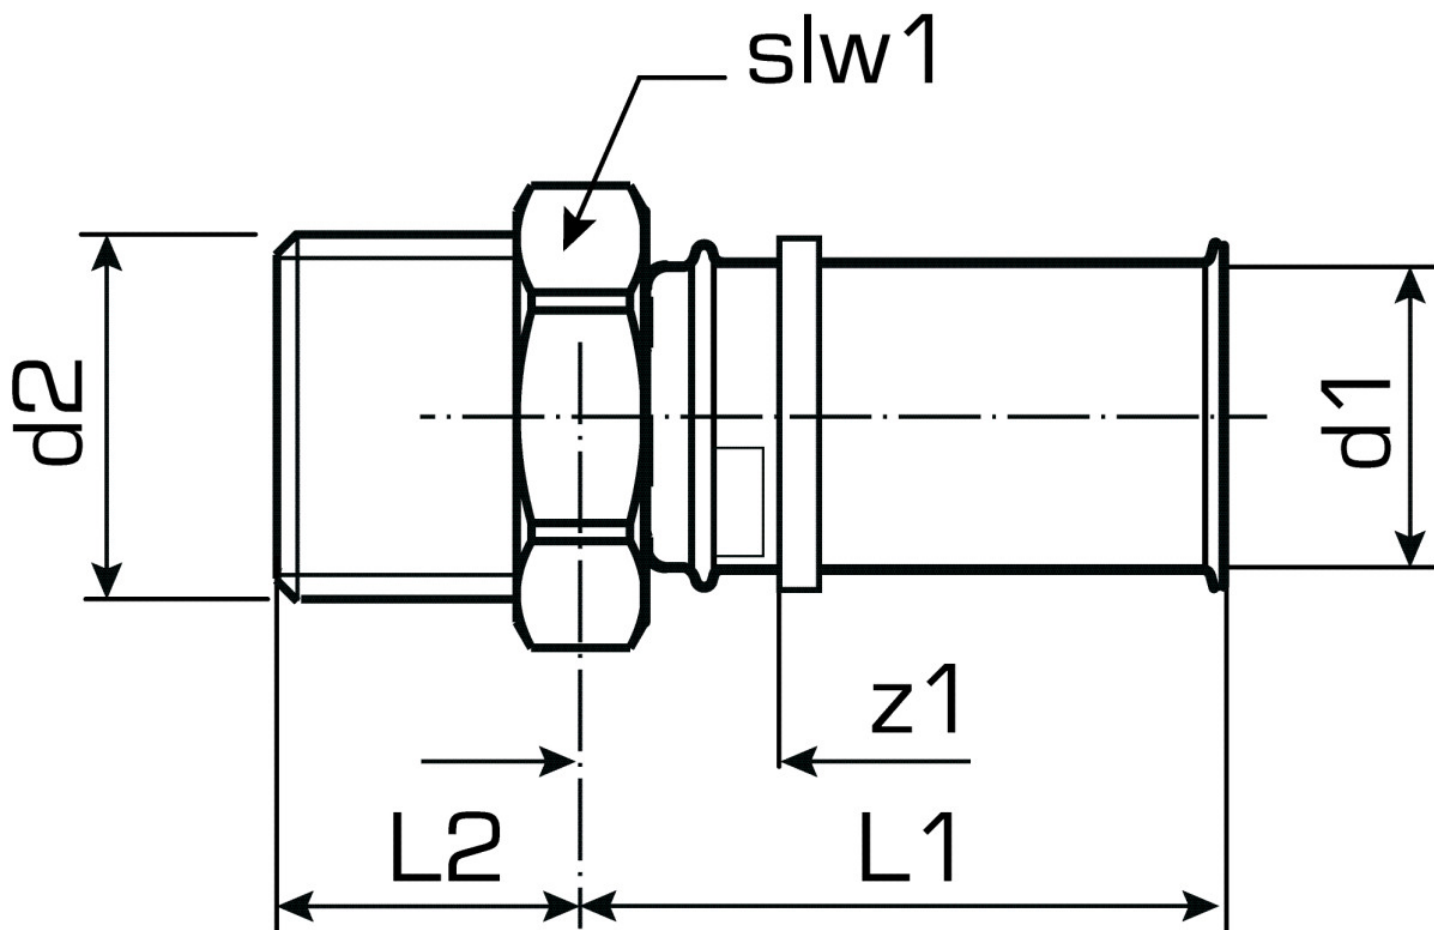

Art. No	label	d2	d1 mm	L1 mm	L2 mm	z1 mm
71402E04	25x3/4"	3/4 Zoll (20)	25	47,5	22	20,5