KMU590E ?KELOX-ULTRAX FB manifold 6 L: 425mm

7906600

Areas of application

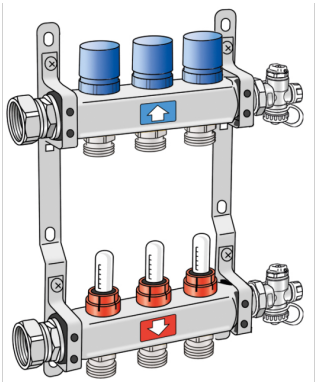

?Stainless steel flow and return flow bar with heating circuit outlets 3/4" Eurocone male, with bleeding and emptying at the manifold end, connections with screwed-in cap nut 1" flat-sealing. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow water meter of 0.5-5.0 l/min adjustable, incl. sound-insulated steel consoles
Application area: tmax. 70 °C/6 bar, 60 °C/10 bar

ATTENTION: WITHOUT KM220 Euro thread fitting!

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com

Specifications

Article information	
extendible	0

Product information	
VPE1	1,00 KT1
VPE2	77,00 PAL
weight	3,6780 KGM
text	?KELOX-ULTRAX FB manifold
INTRNR	84818099
code	KMU590E

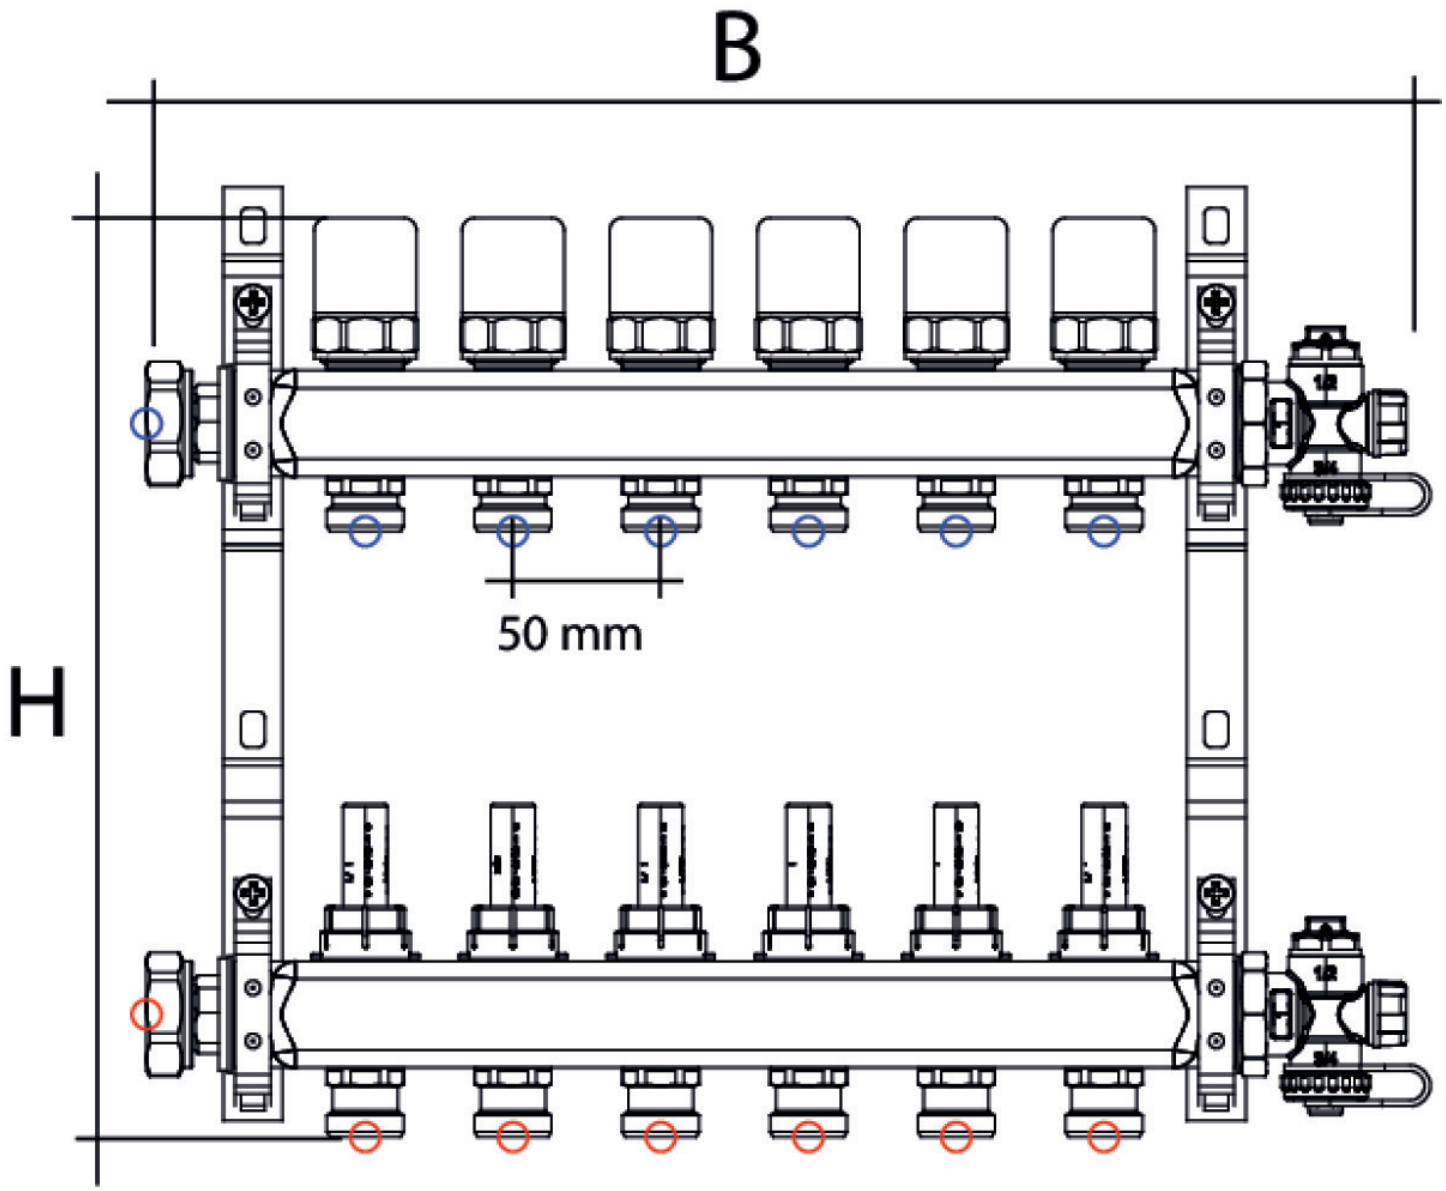

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com

Art. No	label	t mm	t mm	h mm
7906600	6 L: 425mm	80	425	305

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com