KMP590E KELOX-PROTEC FB stainless steel push fitting manifold 12 L: 725mm

73171120

Areas of application

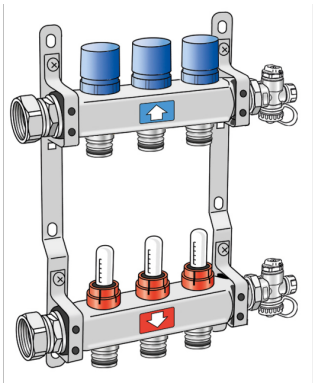

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow water meter of 0.5-5.0 l/min adjustable, incl. sound-insulated steel consoles
Application area: tmax. 70 °C/6 bar, 60 °C/10 bar

ATTENTION: WITHOUT KMP552X PROTEC CLIX quick-push coupling!

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com

Specifications

Article information	
extendible	1

Product information	
VPE1	1,00 KT1
VPE2	49,00 PAL
weight	6,1360 KGM
text	KELOX-PROTEC FB stainless steel push fitting manifold
INTRNR	84818099
code	KMP590E

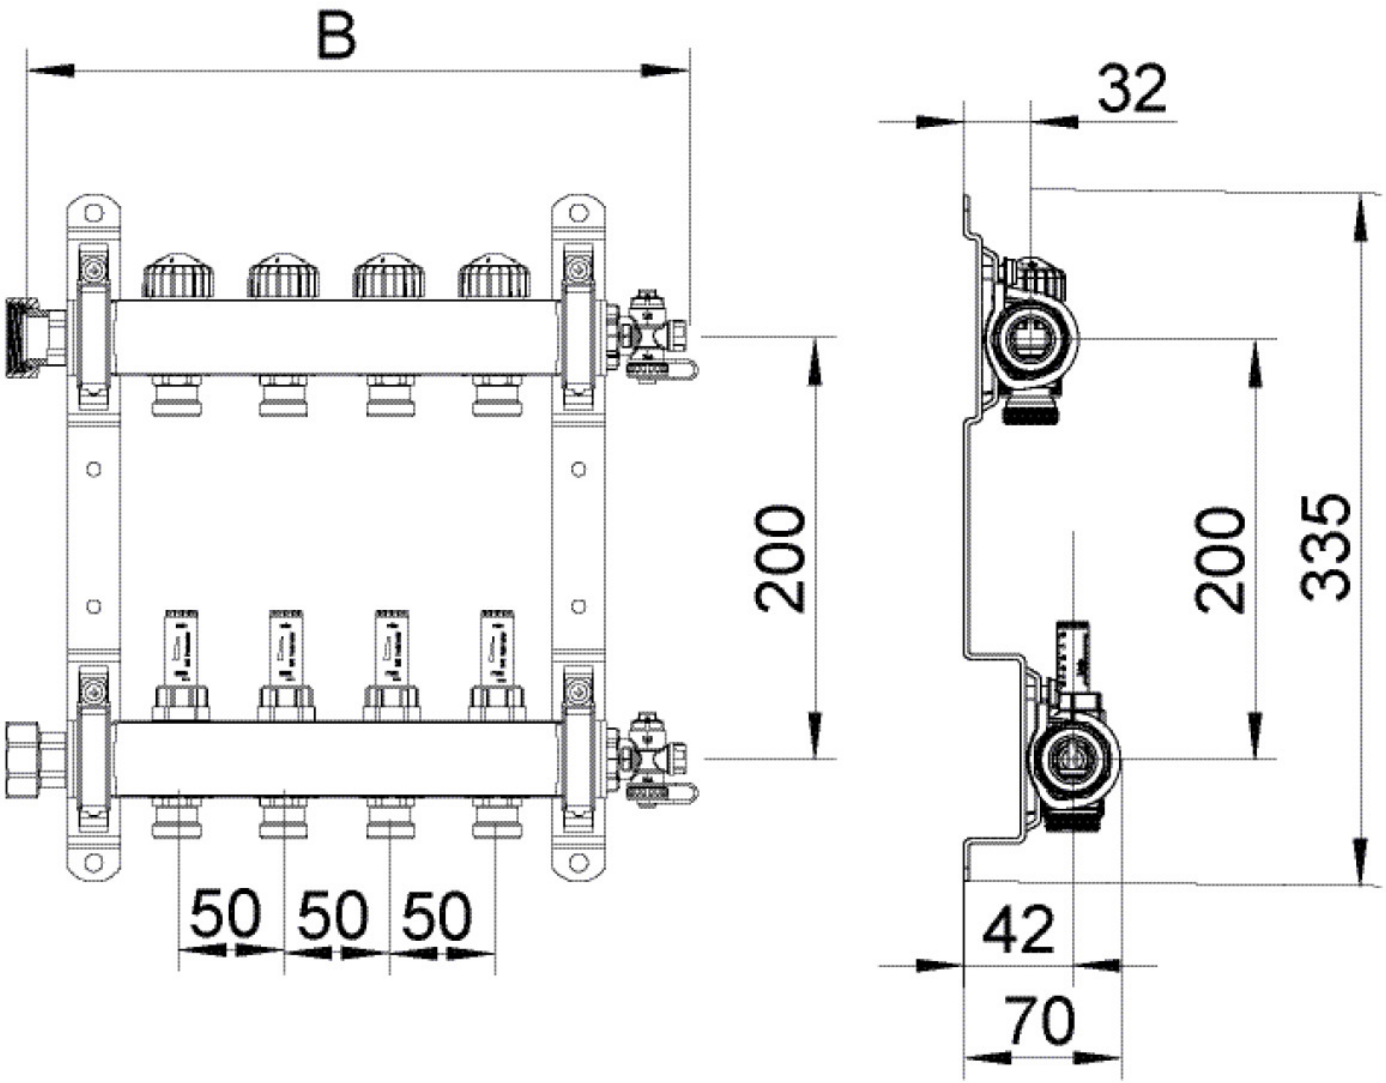

Art. No	label	t mm	t mm	h mm
73171120	12 L: 725mm	80	725	305

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com