


KELOX

KMP432 KELOX-PROTEC radiator tee 20x20/330

73153DD2

Areas of application

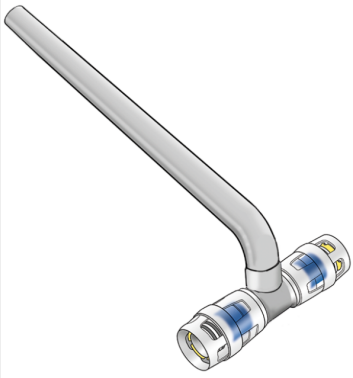

Radiator connecting pipe made of semi-rigid nickel-plated d15 copper with press-fit adaptor tee made from non-porous metallised brass, incl. support sleeves with O-rings, withdrawal barriers and a protector ring as an insertion locking device

Attention! Follow the installation instructions of the screw fitting manufacturers and if necessary use support sleeves for copper connections!

Approvals:



Specifications

Article information


port 1	Plug-in
port 2	Plug-in
port 3	Miscellaneous
execution	Tee piece

Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

Product information

VPE1	1 SA1
VPE2	16 KT1
weight	0,11 KGM
text	KELOX-PROTEC radiator tee
INTRNR	74122000
main material group	KELOX
material group	KELOX-PROtec pushfittings
code	KMP432

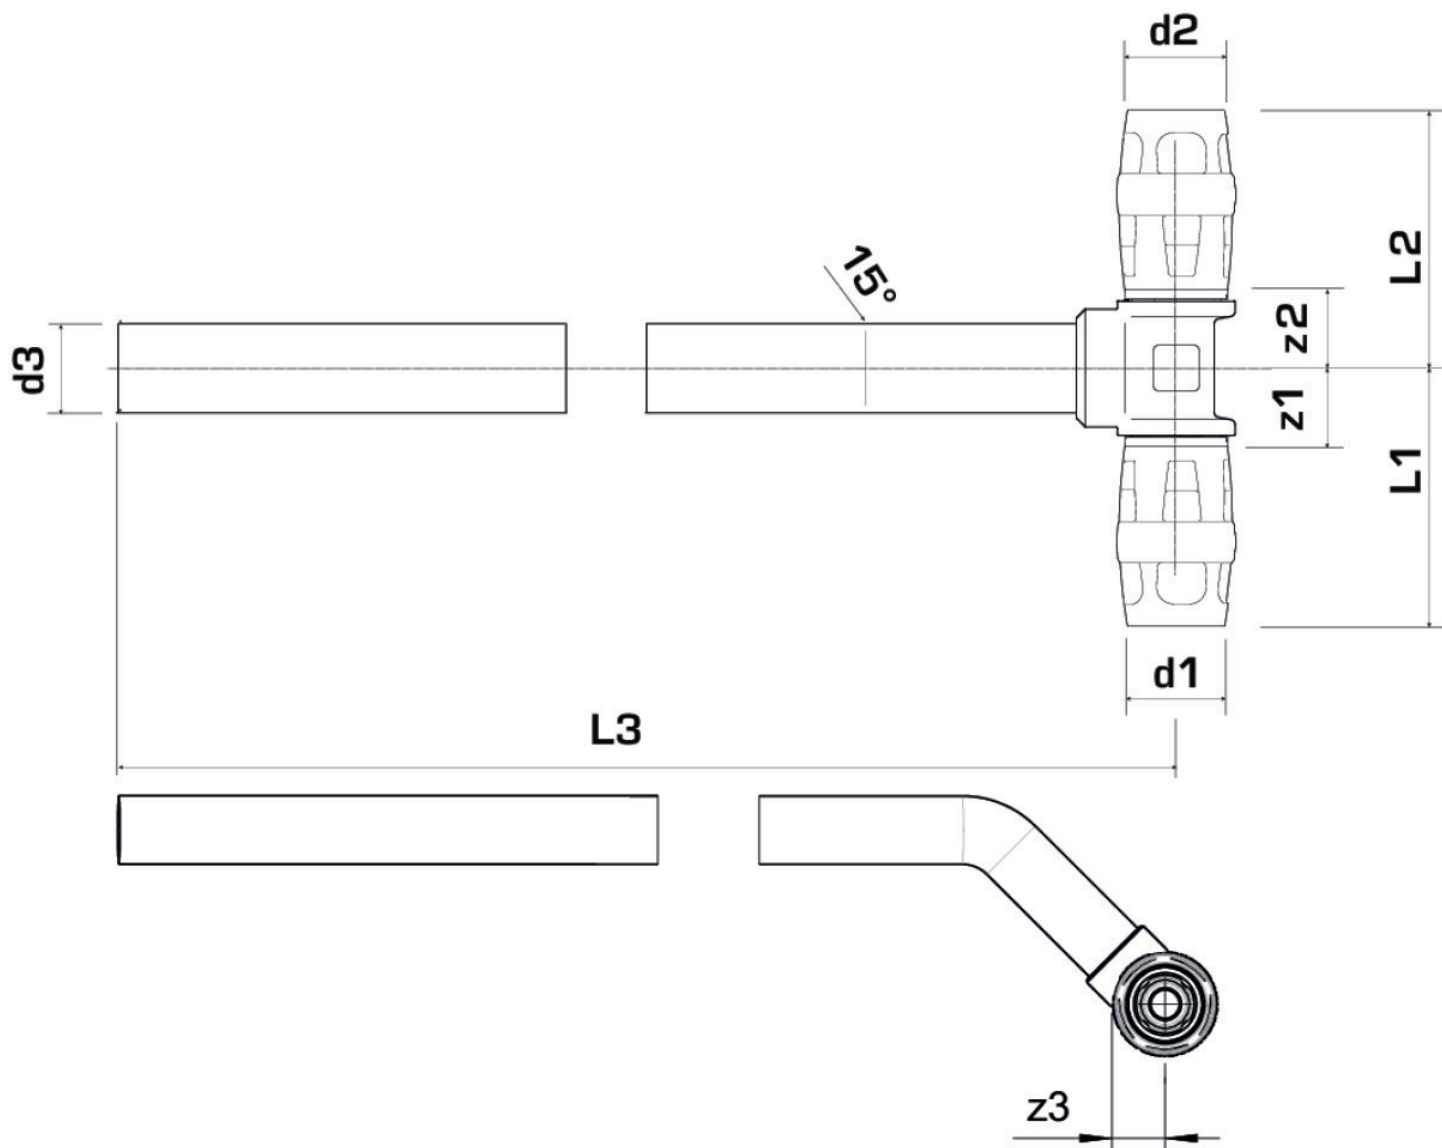

Art. No	label	d1 mm	d2 mm	d3	L1	L2	L3	z1	z2
73153DD2	20x20/330	20	20	15	46.5	46.5	330	13.5	13.5