


KELOX

KMP440 ?KELOX-PROTEC tee piece 32/25/25

73110FEE

Areas of application

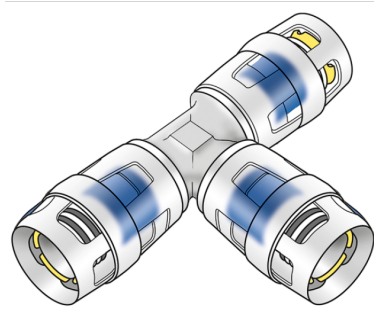

?Plug-in tee piece equal or reduced, made of non-porous metallized brass, incl. support sleeves, O-rings, withdrawal barriers and a protector ring as an insertion locking device

Approvals:



Specifications

Article information


port 1	Plug-in
port 2	Plug-in
port 3	Plug-in
execution	Tee piece
angle	90 °

Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

Product information

VPE1	4 SA1
VPE2	24 KT1
weight	0,318 KGM
text	?KELOX-PROTEC tee piece
INTRNR	74122000
main material group	KELOX
material group	KELOX-PROtec pushfittings
code	KMP440

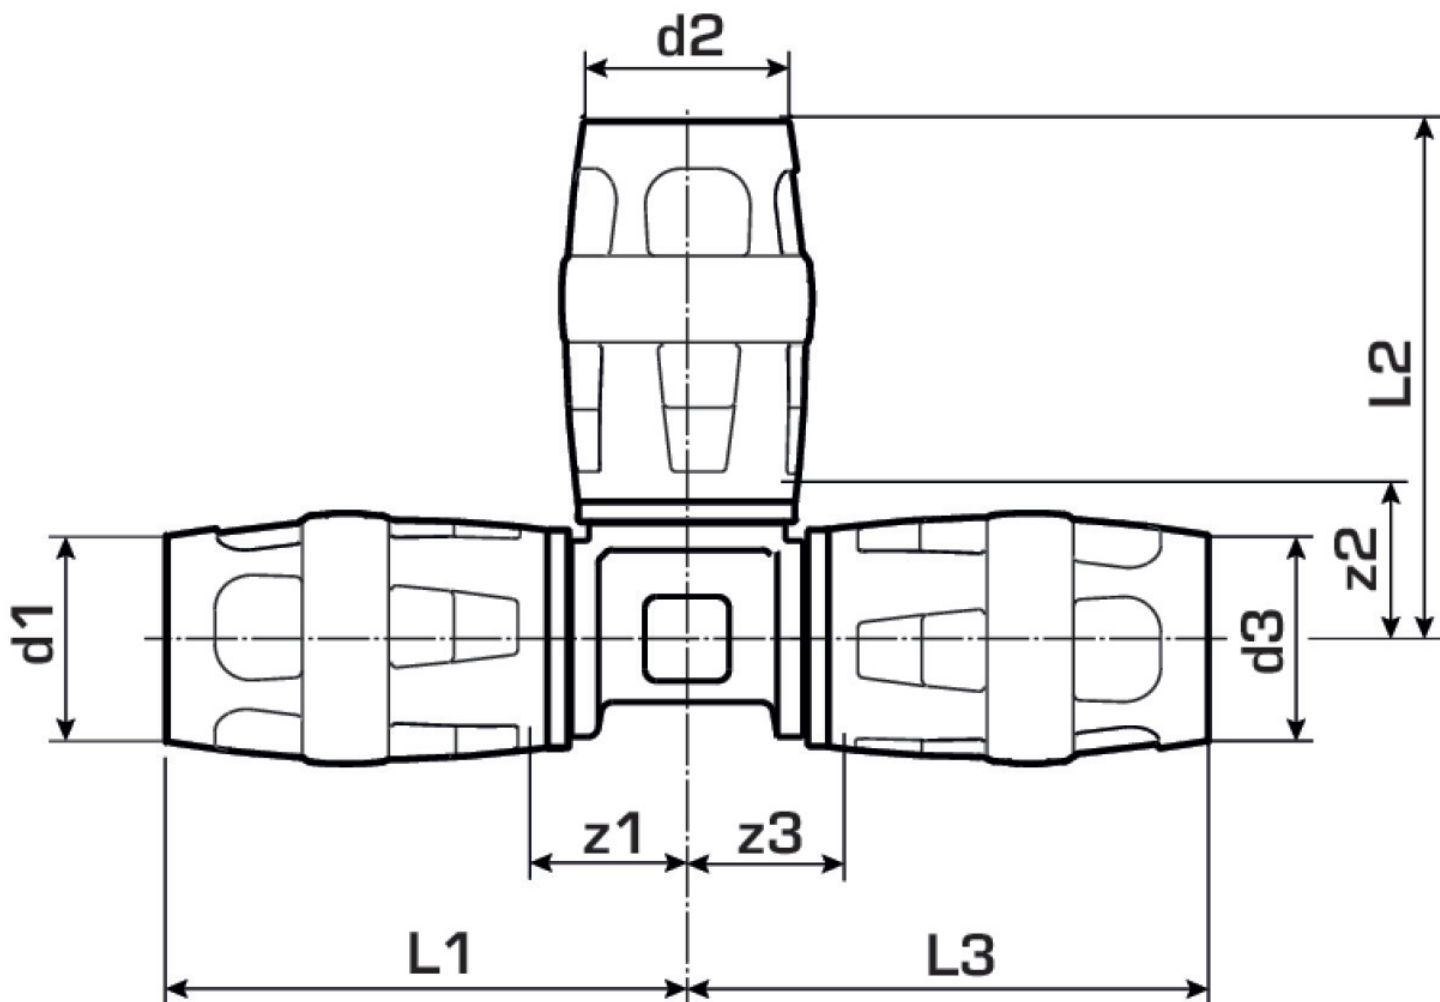

Art. No	label	L1 mm	L2 mm	L3 mm	z1 mm	z2 mm	z3 mm
73110FEE	32/25/25	62.5	62.5	62.5	23.5	23.5	23.5