


CLIMATE FIX

KC3A16 CLIMATEFIX cooling-/heating register d16 3/2250

63571225

Areas of application

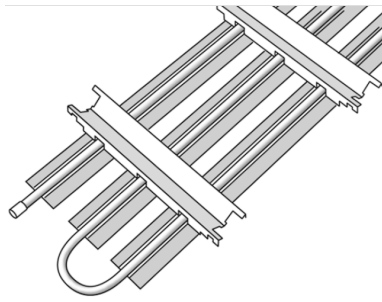

Suspended ceiling cooling and heating register for installation on an on-site prepared substructure (grid spacing 33.3cm). Comprised of a register of bent KELOX-ULTRAX multilayer pipes d16x2mm, oxygen-tight conforming to ÖNORM EN 21003, which are embedded in 3 units of heat-conducting aluminium profiles. The power transmission to the on-site panelling with gypsum climate panels is ensured by the special pressure-maintaining components of the ceiling cooling and heating registers

Module width is suitable for an on-site substructure of 33.3cm

Module length: available from 500 to 3000mm

Pipeline length: approx. 11m/m²

Aluminium heat conducting baffle plates: 3 units/component



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Application area - pipe: tmax 70°C/10 bar

Application area - module: tmax 48°C

The modules are manufactured for the respective project - NO return possible!



KE KELIT GmbH


A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information	
VPE1	1 STK
L	1 m
weight	3,4 KGM
text	CLIMATEFIX cooling-/heating register d16
INTRNR	73145000
main material group	CLIMATEFIX
material group	CLIMATEFIX module
code	KC3A16

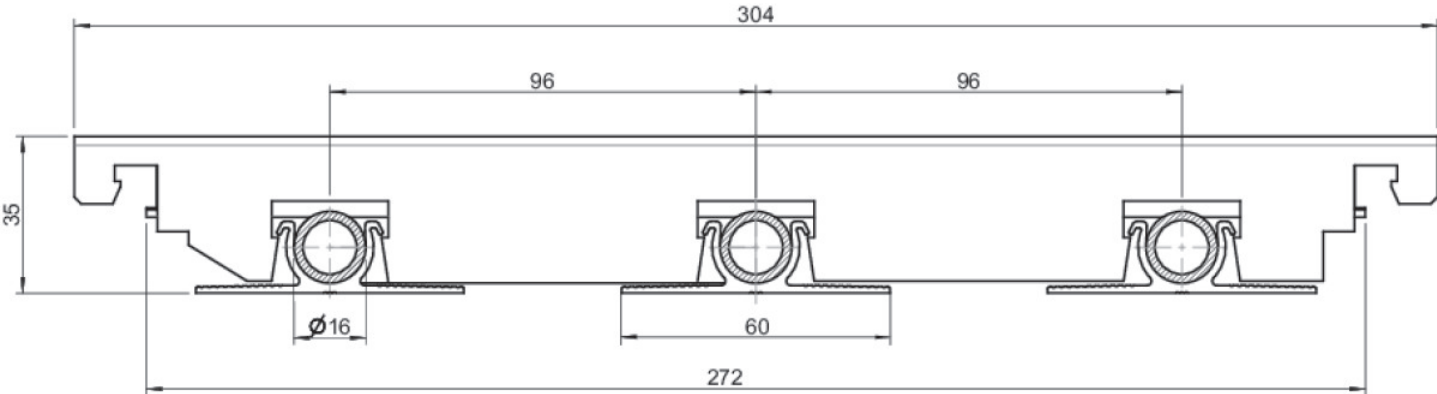

Art. No	label
63571225	3/2250