KWP440X KELOX-PROTEC CLIX PPSU tee 25/20/25

730610EDE

Areas of application

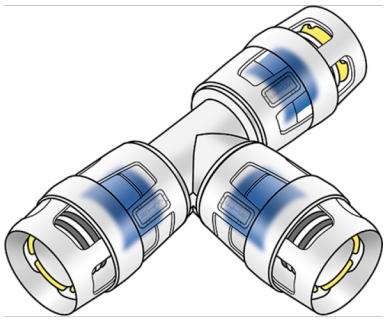

Push tee equal or reduced, made of PPSU, incl. push-fit sleeve made of transparent polyamide with insertion click noise, as well as haptic and optical insertion indicator, O-rings, withdrawal barriers and a protector ring as an insertion locking device

Approvals:

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com

Specifications

Article information	
port 1	insert (push-fitting)
port 2	insert (push-fitting)
port 3	insert (push-fitting)
execution	T-piece
angle	90 °

Technical properties	
maximum working pressure at 20 ° C	10 bar

Product information	
VPE1	4,00 SA1
VPE2	40,00 KT1
weight	0,0740 KGM
text	KELOX-PROTEC CLIX PPSU tee
INTRNR	39174000
main material group	KELOX
material group	KELOX-PROtec-PPSU pushfittings
code	KWP440X

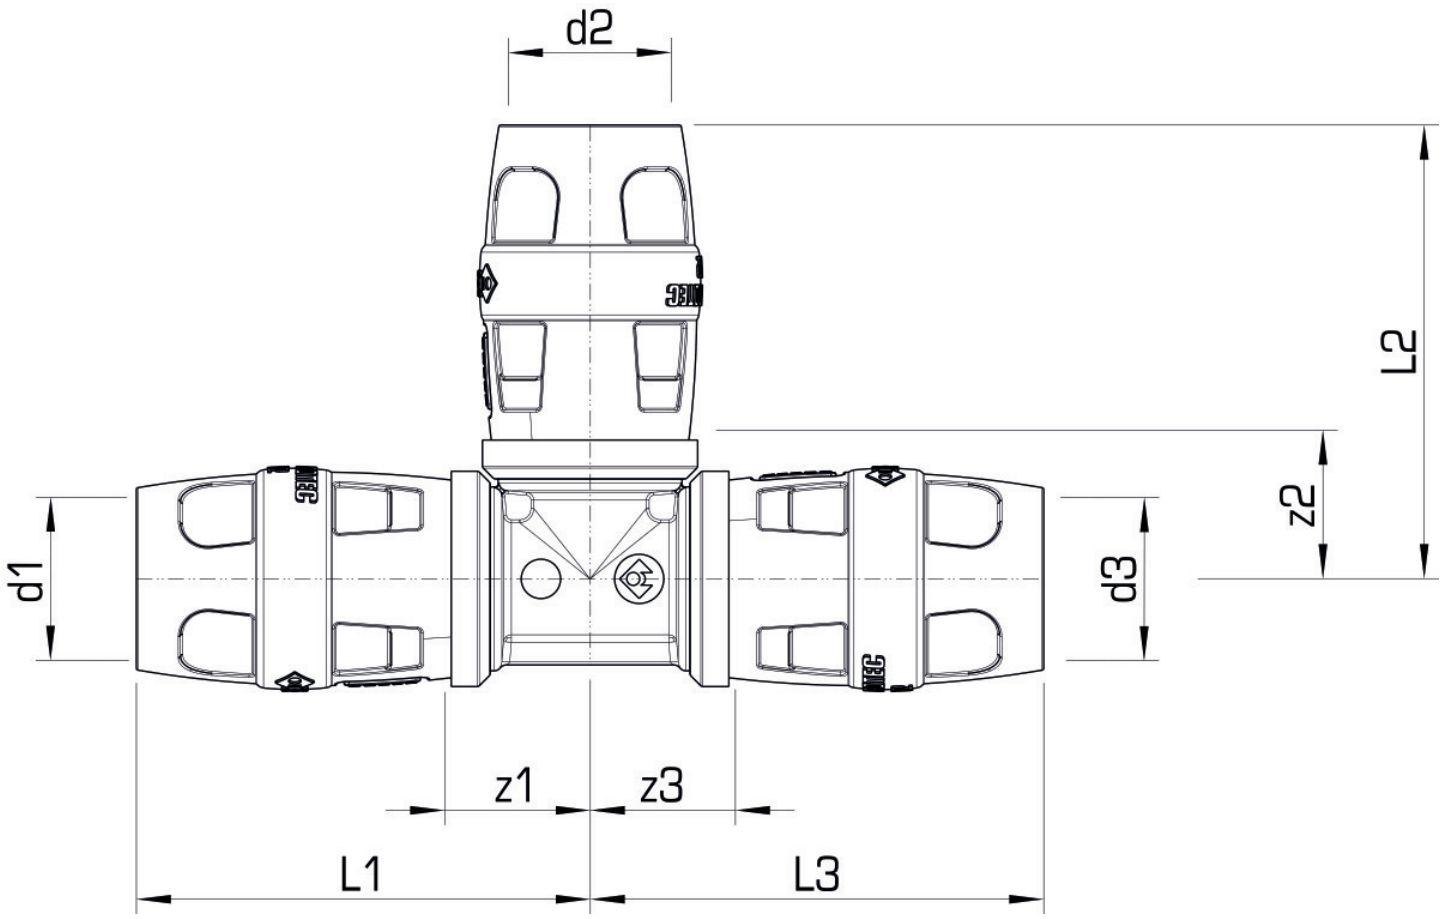

Art. No	label	d1 mm	d2 mm	d3 mm	L1 mm	L2 mm	L3 mm	z1 mm	z2 mm	z3 mm
730610EE	25/20/25	25	20	25	58	52	58	21	20	21

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com