KMP410X KELOX-PROTEC CLIX coupling 32/32

730100FF0

Areas of application

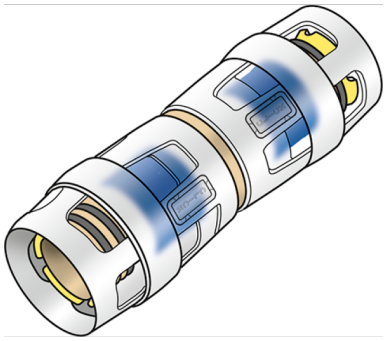

Push-fit coupling equal or reduced, made of dezincification-resistant brass (DZR), incl. push-fit sleeve made of transparent polyamide with insertion click noise, as well as haptic and optical insertion indicator, O-rings, withdrawal barriers and a protector ring as an insertion locking device

Approvals:

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com

Specifications

Article information	
port 1	insert (push-fitting)
port 2	insert (push-fitting)
execution	other
design	straight

Technical properties	
maximum working pressure at 20 ° C	10 bar

Product information	
VPE1	10,00 SA1
VPE2	60,00 KT1
weight	0,1470 KGM
text	KELOX-PROTEC CLIX coupling
INTRNR	74122000
main material group	KELOX
material group	KELOX-PROtec pushfittings
code	KMP410X

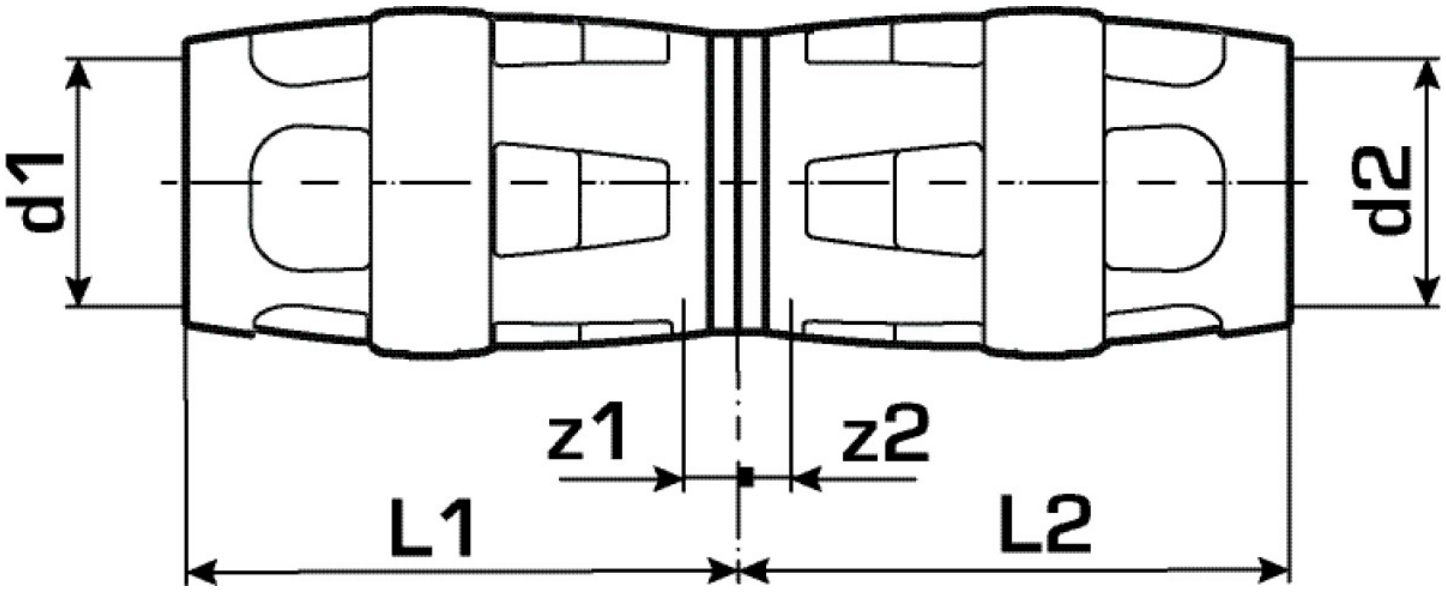

Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm	z1 mm	z2 mm
730100FF0	32/32	32	32	43	43	4	4

KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com