


# COPPER FIX

COF440 Copper press-tee 22/15/15

52630DBB

## Areas of application

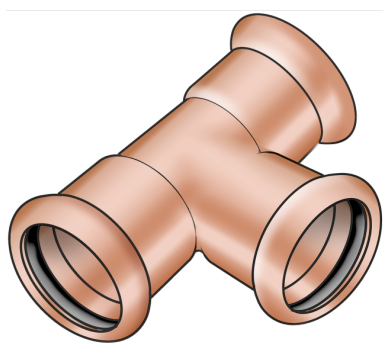

Press-fit tee equal or reduced made of copper, incl. EPDM sealing components, "leak before pressed"

Press contour: M

## Approvals:



# Specifications

## Article information


|               |            |
|---------------|------------|
| port 1        | Pressmuffe |
| port 2        | Pressmuffe |
| port 3        | Pressmuffe |
| execution     | T-Stück    |
| angle         | 90 °       |
| press contour | M          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                      |
|---------------------|----------------------|
| VPE1                | 10 SA1               |
| VPE2                | 50 KT1               |
| weight              | 0,123 KGM            |
| text                | Copper press-tee     |
| INTRNR              | 74122000             |
| main material group | COPPERFIX            |
| material group      | KUPFER pressfittings |
| code                | COF440               |

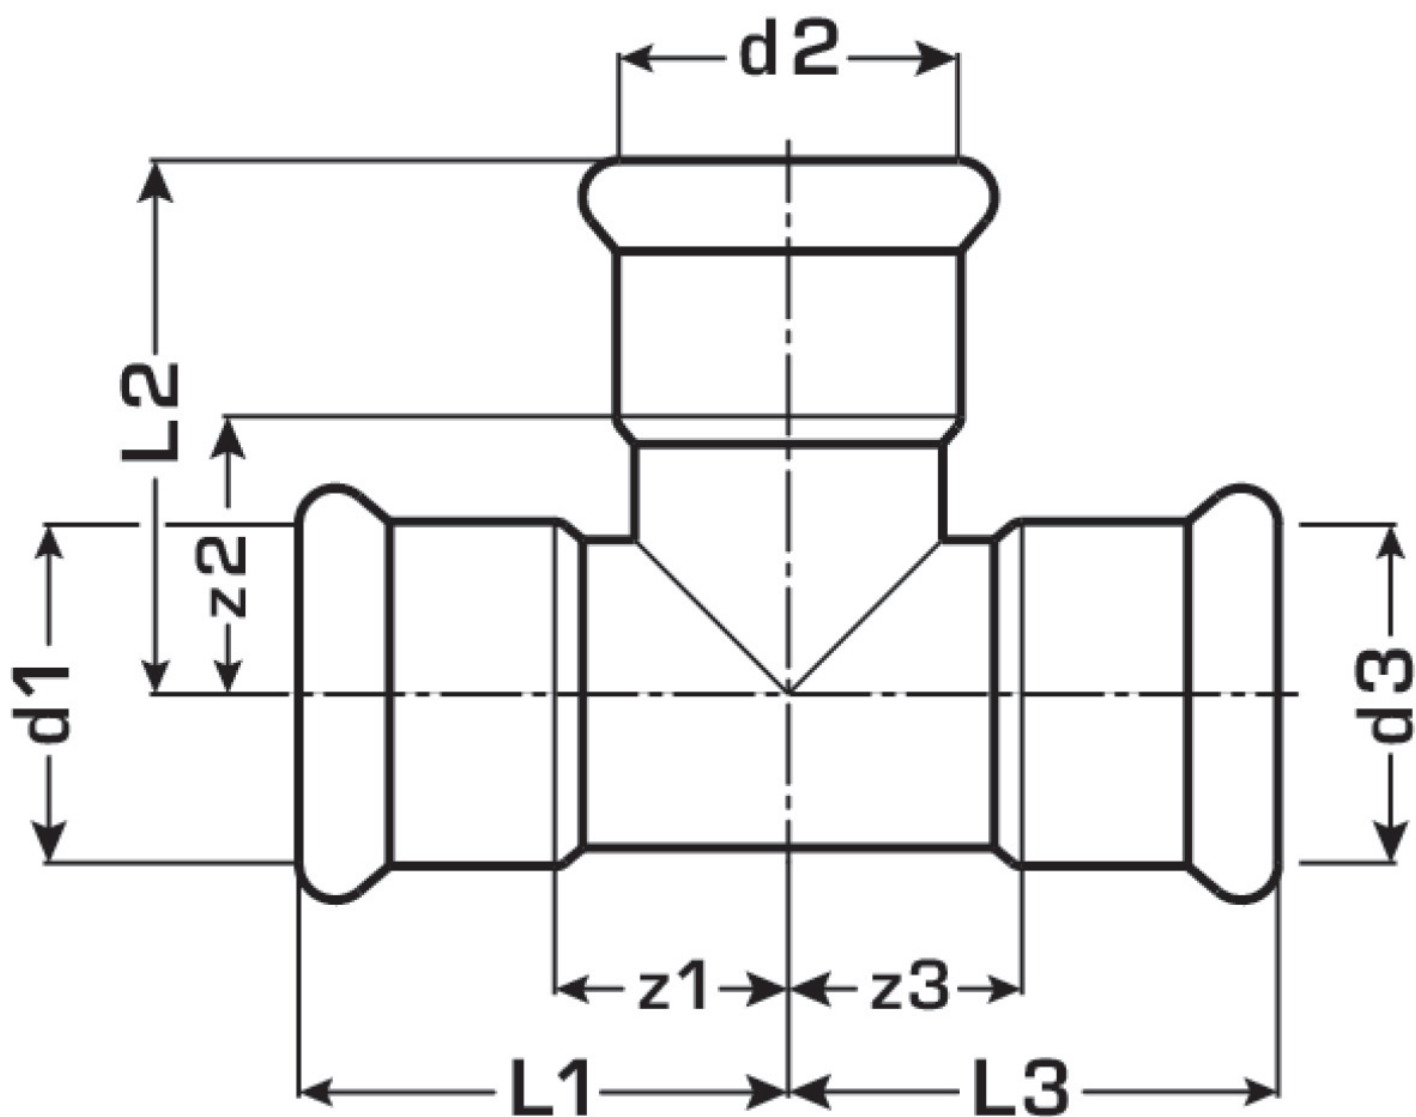

| Art. No  | label    | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|----------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 52630DBE | 22/15/15 | 22    | 15    | 15    | 37    | 44    | 43    | 16    | 18    | 23    |