


# CLIMATE FIX

## KC3A16 CLIMATEFIX cooling-/heating register d16 3/3000

63571300

### Areas of application

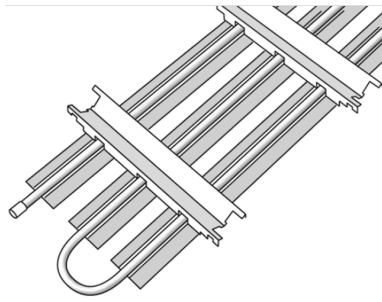

Suspended ceiling cooling and heating register for installation on an on-site prepared substructure (grid spacing 33.3cm). Comprised of a register of bent KELOX-ULTRAX multilayer pipes d16x2mm, oxygen-tight conforming to ÖNORM EN 21003, which are embedded in 3 units of heat-conducting aluminium profiles. The power transmission to the on-site panelling with gypsum climate panels is ensured by the special pressure-maintaining components of the ceiling cooling and heating registers

Module width is suitable for an on-site substructure of 33.3cm

Module length: available from 500 to 3000mm

Pipeline length: approx. 11m/m<sup>2</sup>

Aluminium heat conducting baffle plates: 3 units/component

Application area - pipe: tmax 70°C/10 bar

Application area - module: tmax 48°C

The modules are manufactured for the respective project - NO return possible!



**KE KELIT GmbH**


A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

| Product information |                                          |
|---------------------|------------------------------------------|
| VPE1                | 1 STK                                    |
| L                   | 1 m                                      |
| weight              | 4,5 KGM                                  |
| text                | CLIMATEFIX cooling-/heating register d16 |
| INTRNR              | 73145000                                 |
| main material group | CLIMATEFIX                               |
| material group      | CLIMATEFIX module                        |
| code                | KC3A16                                   |

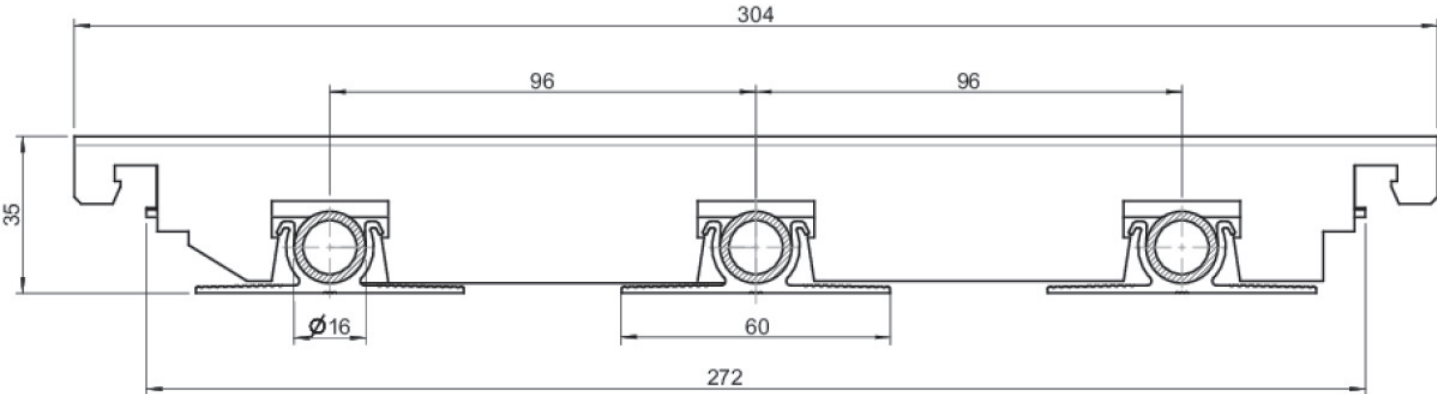

| Art. No  | label  |
|----------|--------|
| 63571300 | 3/3000 |