


# CLIMATE FIX

## KCG3SAE CLIMATEFIX-ALOX cooling/heating register d15 15/96/1000

63572100

### Areas of application

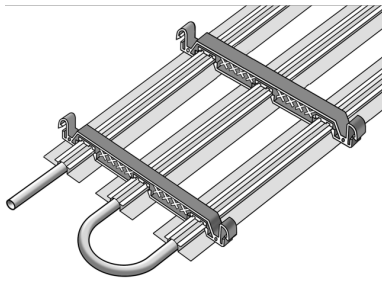

Suspended ceiling cooling and heating register for installation on an on-site prepared substructure (grid spacing 33.3cm). Consisting of a register of meander-shaped bent CLIMATEFIX-ALOX multilayer pipes d15mm, oxygen-tight based on ÖNORM EN 21003, which are inserted in 3 galvanised-steel heat-conducting profiles. Power transmission to the on-site panelling with gypsum climate panels is ensured by the special pressure-maintaining components of the ceiling cooling and heating registers

Module width is suitable for an on-site substructure of 33.3cm

Module length: available from 500 to 3000mm

Pipeline length: approx. 11m/m<sup>2</sup>

Heat conducting plates: 3 pcs./Element

Area of application - Pipe: 50°C - tmax 60°C/6 bar

Area of application - module: tmax 48°C

Modules are manufactured for the respective project - NO return possible!

ATTENTION only compatible with KELOX PROTEC!



**KE KELIT GmbH**


A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

| Product information |                                              |
|---------------------|----------------------------------------------|
| VPE1                | 1 STK                                        |
| L                   | 1,5 m                                        |
| weight              | 2,454 KGM                                    |
| text                | CLIMATEFIX-ALOX cooling/heating register d15 |
| INTRNR              | 73145000                                     |
| main material group | CLIMATEFIX                                   |
| material group      | CLIMATEFIX module                            |
| code                | KCG3SAE                                      |

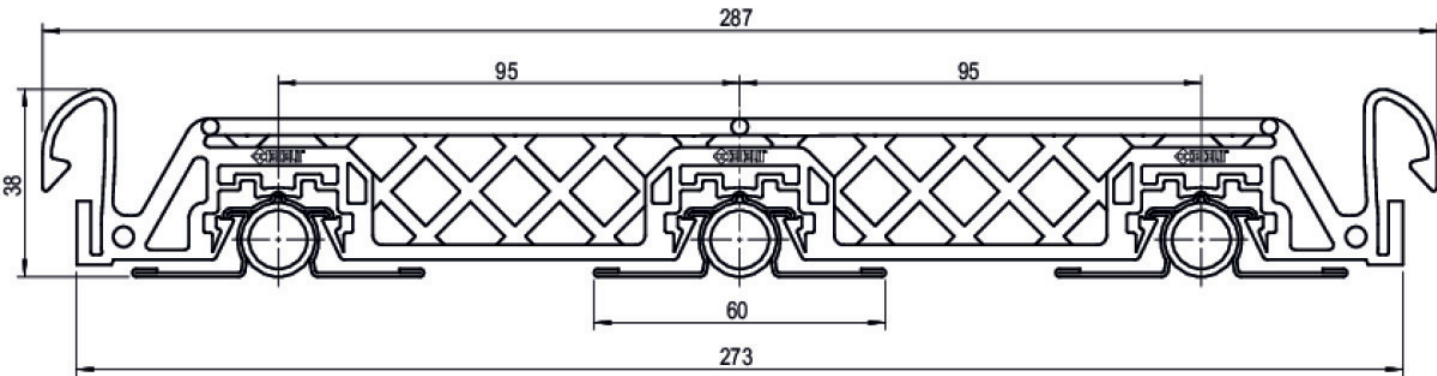

| Art. No  | label      |
|----------|------------|
| 63572100 | 15/96/1000 |

