


CLIMATE FIX

KCG3SAE CLIMATEFIX-ALOX cooling/heating register d15 15/96/2750

63572275

Areas of application

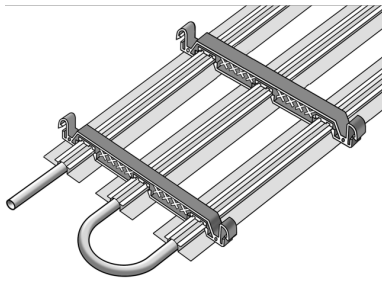

Suspended ceiling cooling and heating register for installation on an on-site prepared substructure (grid spacing 33.3cm). Consisting of a register of meander-shaped bent CLIMATEFIX-ALOX multilayer pipes d15mm, oxygen-tight based on ÖNORM EN 21003, which are inserted in 3 galvanised-steel heat-conducting profiles. Power transmission to the on-site panelling with gypsum climate panels is ensured by the special pressure-maintaining components of the ceiling cooling and heating registers

Module width is suitable for an on-site substructure of 33.3cm

Module length: available from 500 to 3000mm

Pipeline length: approx. 11m/m²



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Heat conducting plates: 3 pcs./Element

Area of application - Pipe: 50°C - tmax 60°C/6 bar

Area of application - module: tmax 48°C

Modules are manufactured for the respective project - NO return possible!

ATTENTION only compatible with KELOX PROTEC!



KE KELIT GmbH


A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information	
VPE1	1 STK
L	2,75 m
weight	6,787 KGM
text	CLIMATEFIX-ALOX cooling/heating register d15
INTRNR	73145000
main material group	CLIMATEFIX
material group	CLIMATEFIX module
code	KCG3SAE

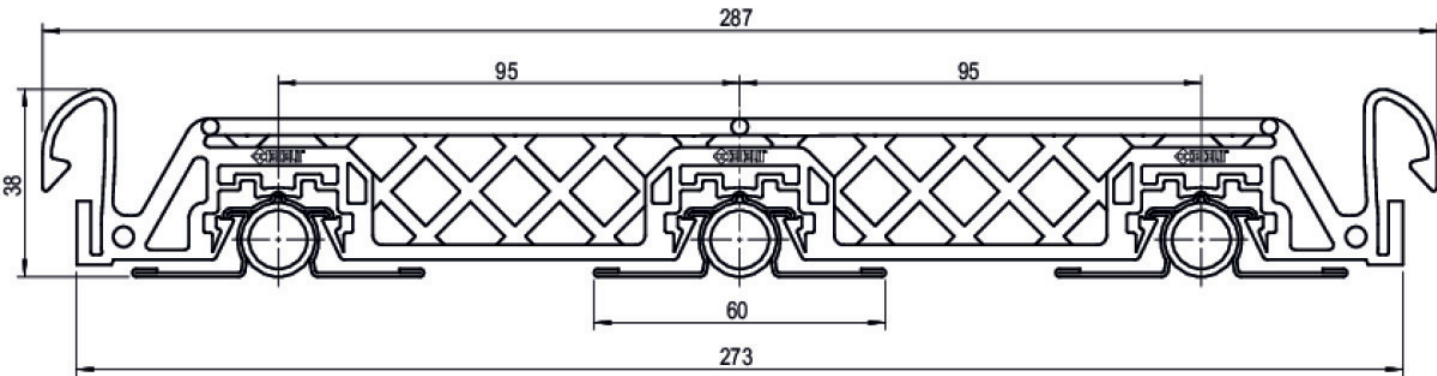

Art. No	label
63572275	15/96/2750