


# KELIT PEX

## PEX03-1 KELIT DUO-PEX pipe insulation series 1 32+32x2.9

3040215

### Areas of application

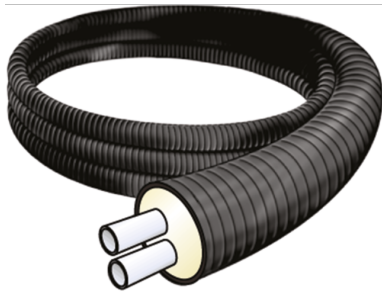

Media pipe made from cross-linked polyethylene and coloured O<sub>2</sub> diffusion layer, SDR 11

Area of application: PN12.5 / 20°C - PN6 / 80°C - t<sub>max</sub> 95°C

Heat insulation: PUR foam complying with EN 253/EN 15632, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation


# Specifications

## Technical properties

|                     |             |
|---------------------|-------------|
| pipe weight         | 1,90 kg/m   |
| pipe contents       | 2x 0,53 l/m |
| diameter inner tube | 32 mm       |

## Product information

|                     |                                        |
|---------------------|----------------------------------------|
| casing DA           | 111                                    |
| VPE1                | 1 LFM                                  |
| VPE2                | 429 ROL                                |
| L                   | 429 m                                  |
| weight              | 1,87 KGM                               |
| text                | KELIT DUO-PEX pipe insulation series 1 |
| INTRNR              | 39173900                               |
| main material group | KELIT PEX                              |
| material group      | PEX pipe                               |
| code                | PEX03-1                                |

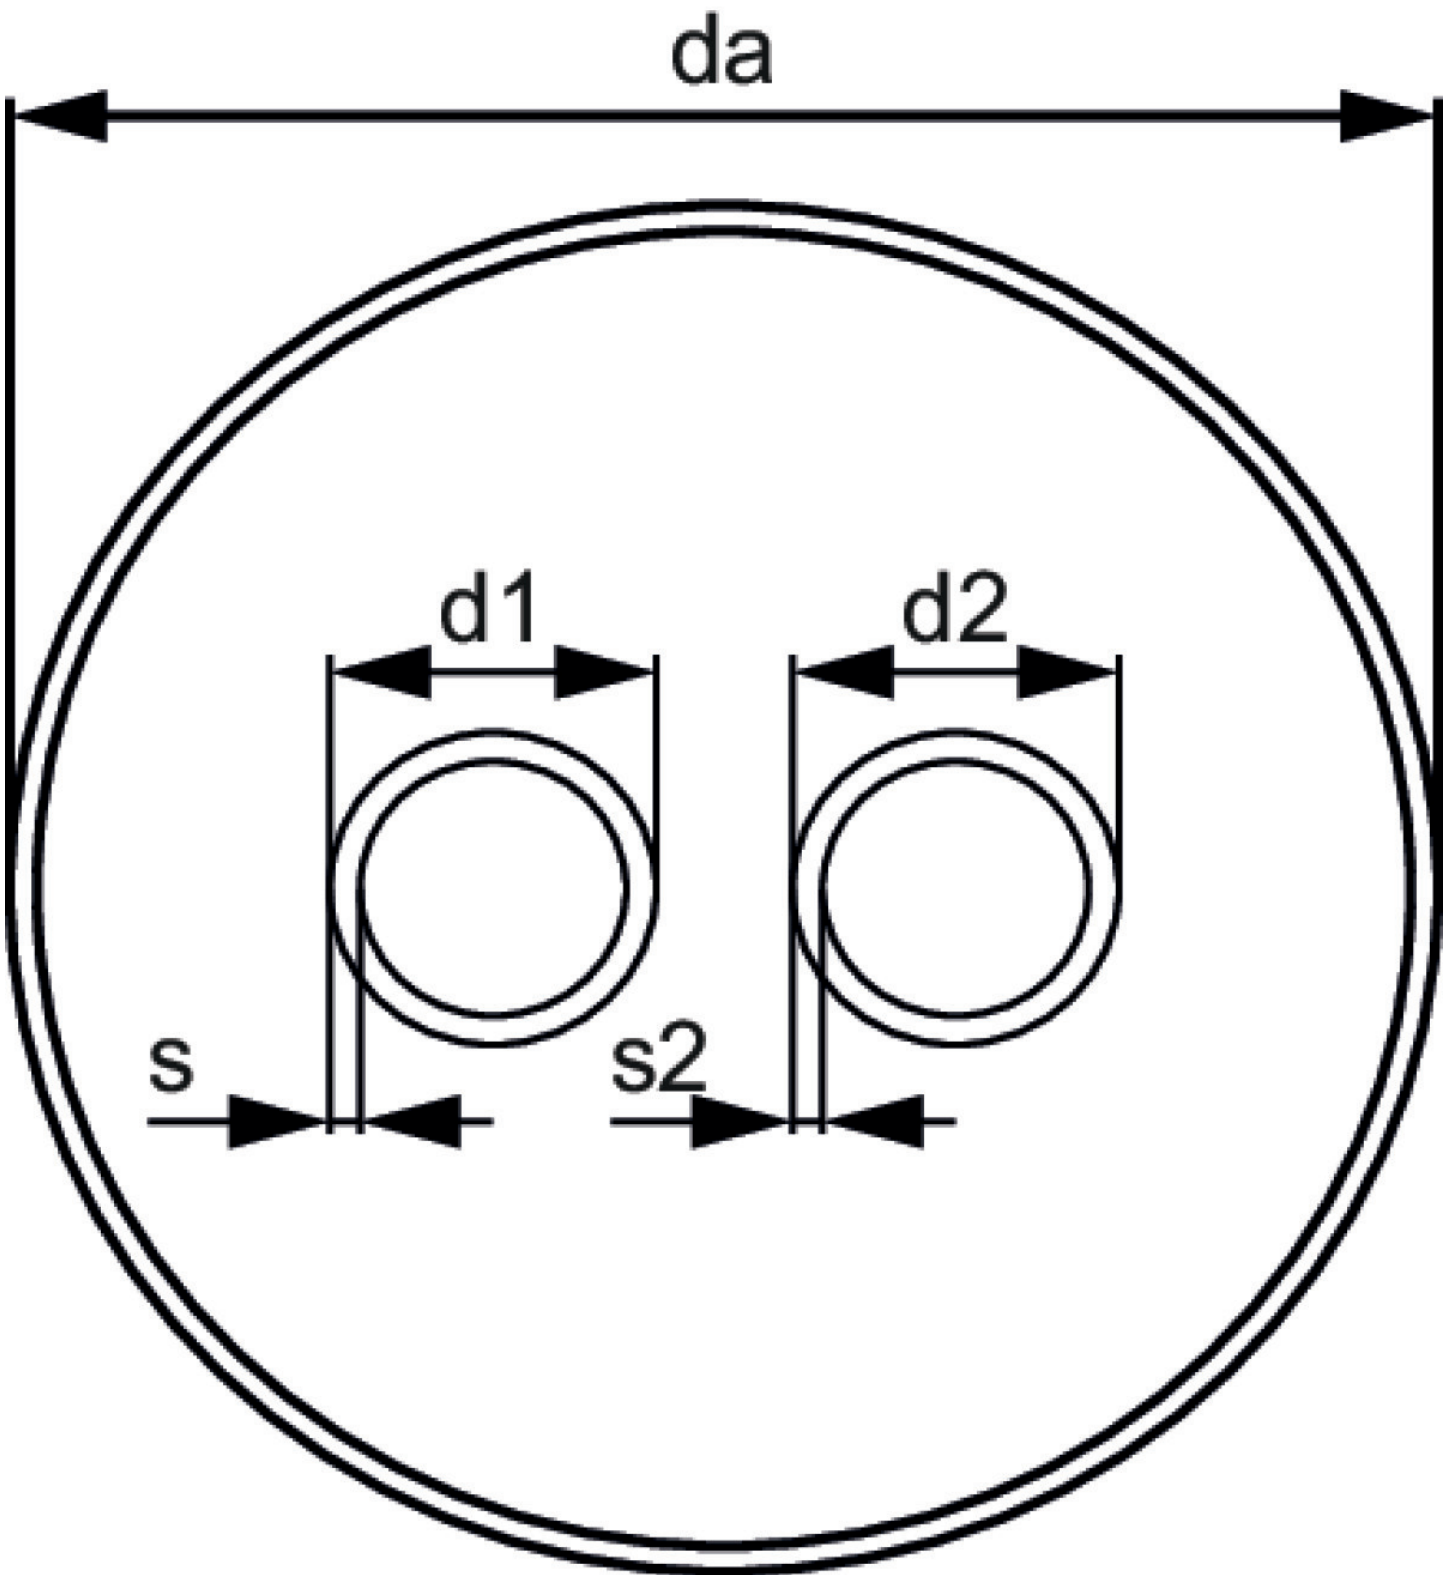

| Art. No | label     | pipe contents l/m |
|---------|-----------|-------------------|
| 3040215 | 32+32x2.9 | 2x 0,53           |