


KM100 KELOX multilayer pipe 16x2/25

75211625

Areas of application

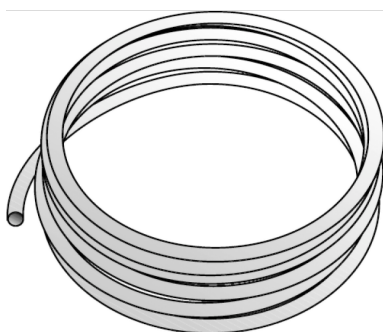

KELOX multilayer pipe conforming to ÖNORM EN ISO 21003; oxygen- and water vapour-tight 5-layer multilayer pipe made of PE-RT/Al/ PE-RT;

Classification of operating conditions according to ÖNORM EN ISO 21003

Sanitary application - Class 2: 70°C - tmax 80°C/10 bar

Radiator connection - Class 5: 80°C - tmax 90°C/10 bar

Colour: white/transparent

Supplied in coils

Approvals:



Specifications

Article information

color weiß

flexible 1

Technical properties

maximum working pressure at 20 ° C 10 bar

pipe weight 0,11 kg/m

lambda pipe 0,45 W/(m.K)

Product information

VPE1 25 ROL

VPE2 300 KT1

VPE3 1200 PAL

L 25 m

weight 0,11 KGM


text KELOX multilayer pipe

INTRNR 39173900

main material group KELOX

material group KELOX pipes

code KM100

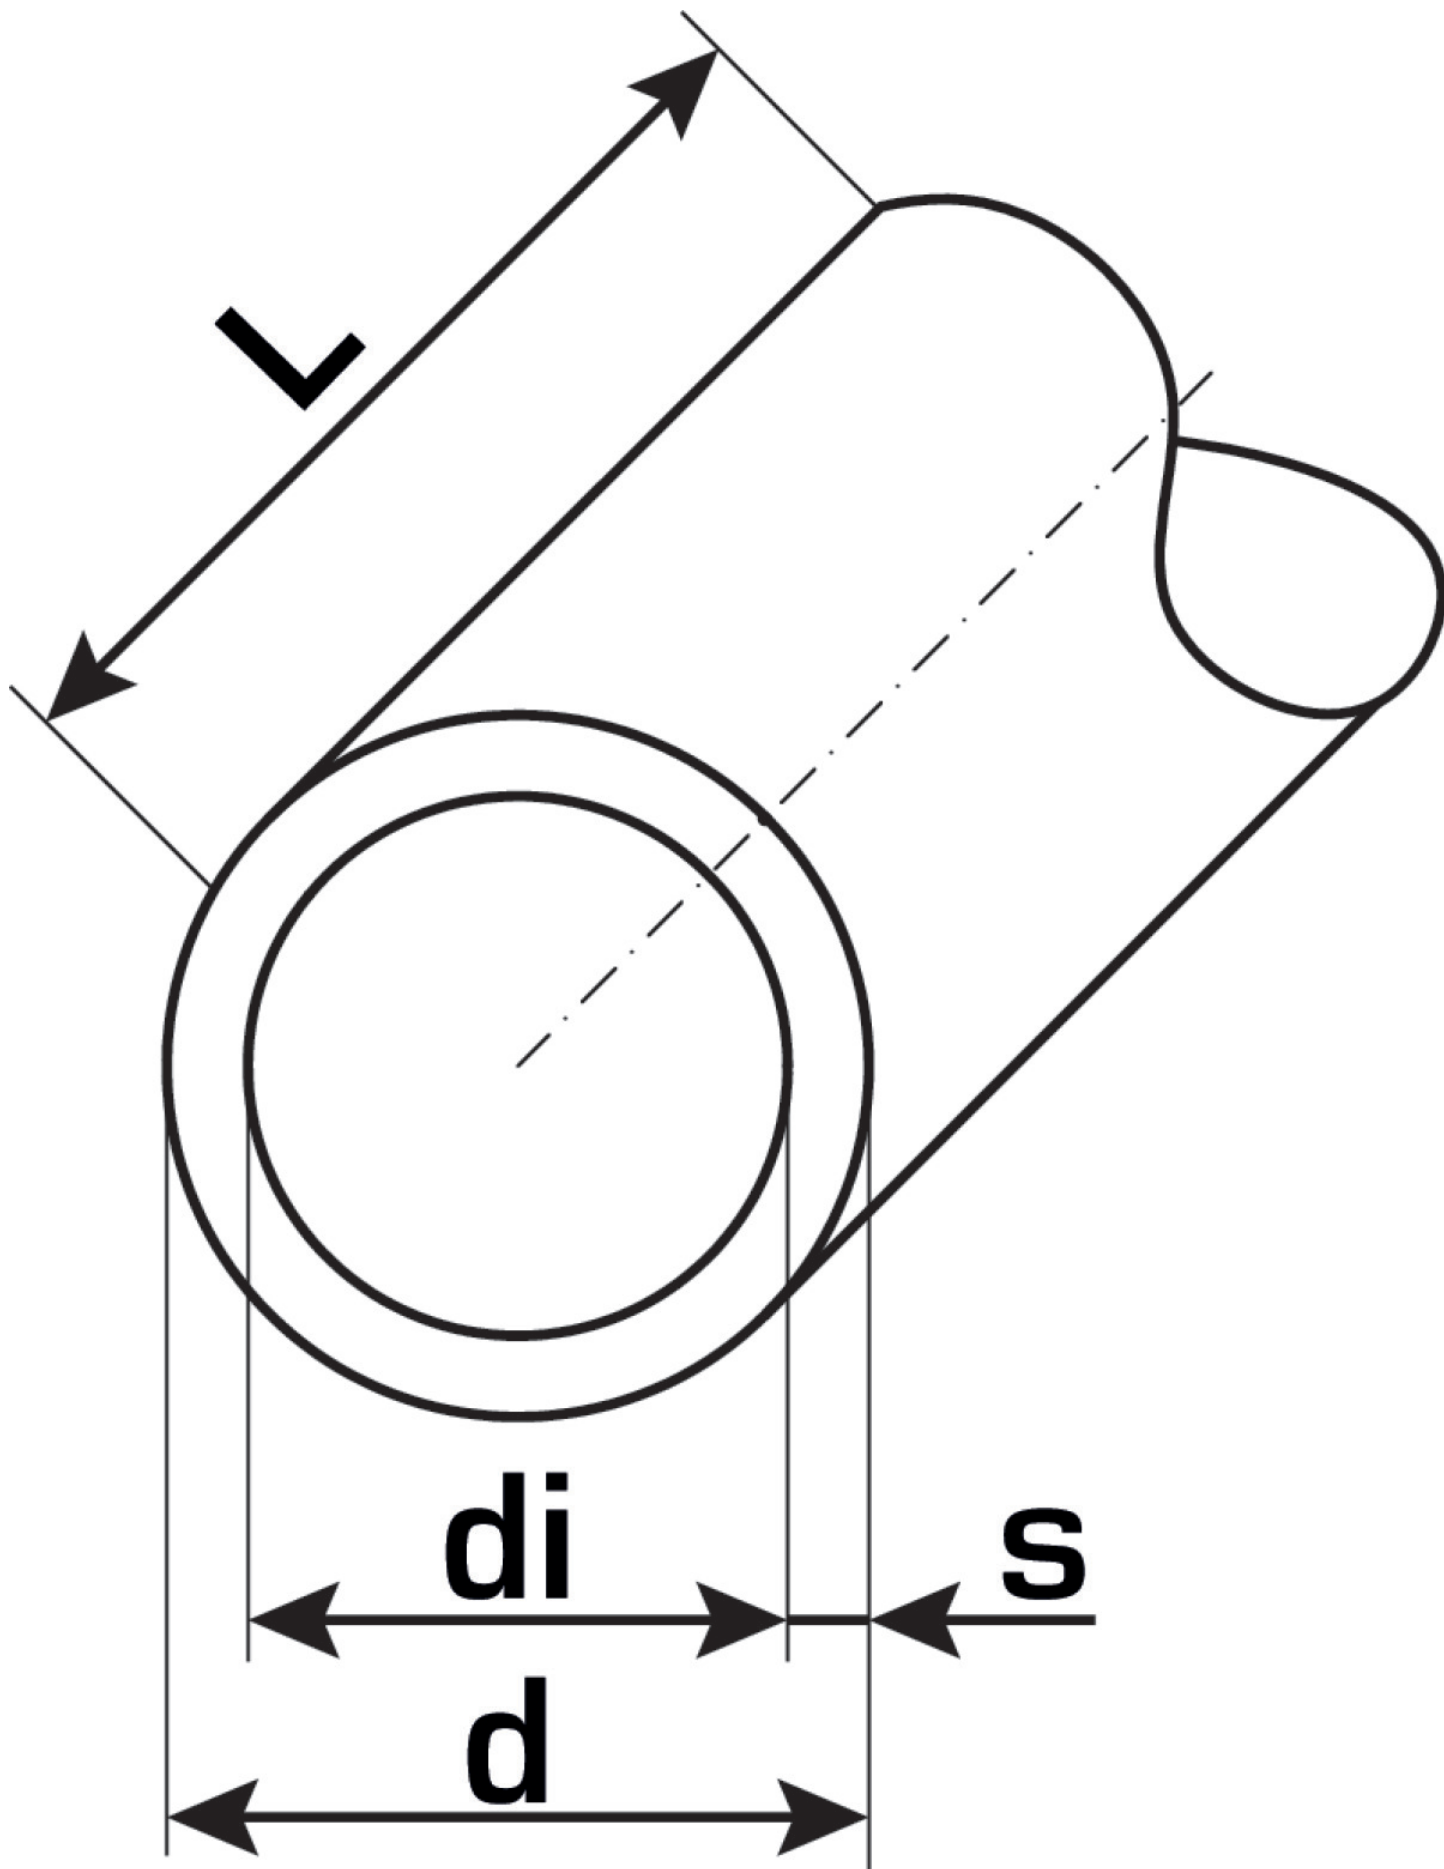

Art. No	label
75211625	16x2/25

