


KELOX

KUC100 KELOX-ECO pipe 20x2,25

7032020

Areas of application

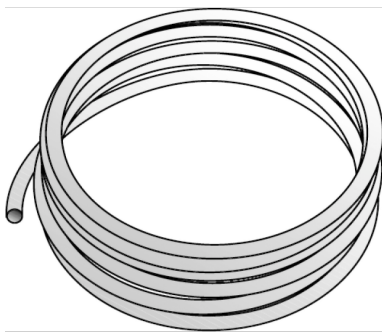

KELOX-ECO solid-wall pipe conforming to ÖNORM EN ISO 22391 made of PE-RT Type 2.

Connections can be made with KM screw fittings, KMP, KWP, KMU and KWX fittings.

Classification of operating conditions according to ÖNORM EN ISO 21003

Cold water application range: 20 °C - 10 bar

Warm water application range: 60 °C - 6 bar

Colour: white

Supplied in coils

Approvals:



Specifications

Article information


color	white
flexible	Yes
trade length	100 m
isolation	No

Technical properties

maximum working pressure at 20 ° C	10
pipe weight	0.125 kg/m
pipe contents	0.189 l/m
lambda pipe	0.40 W/(m.K)
wall rawness	0,007 mm
expansion coefficient	0,19 mm/(m.K)

Product information

VPE1	100 ROL
VPE2	1300 PAL
L	100 m
weight	0,125 KGM
text	KELOX-ECO pipe
INTRNR	39173900
main material group	KELOX
material group	KELOX pipes
code	KUC100

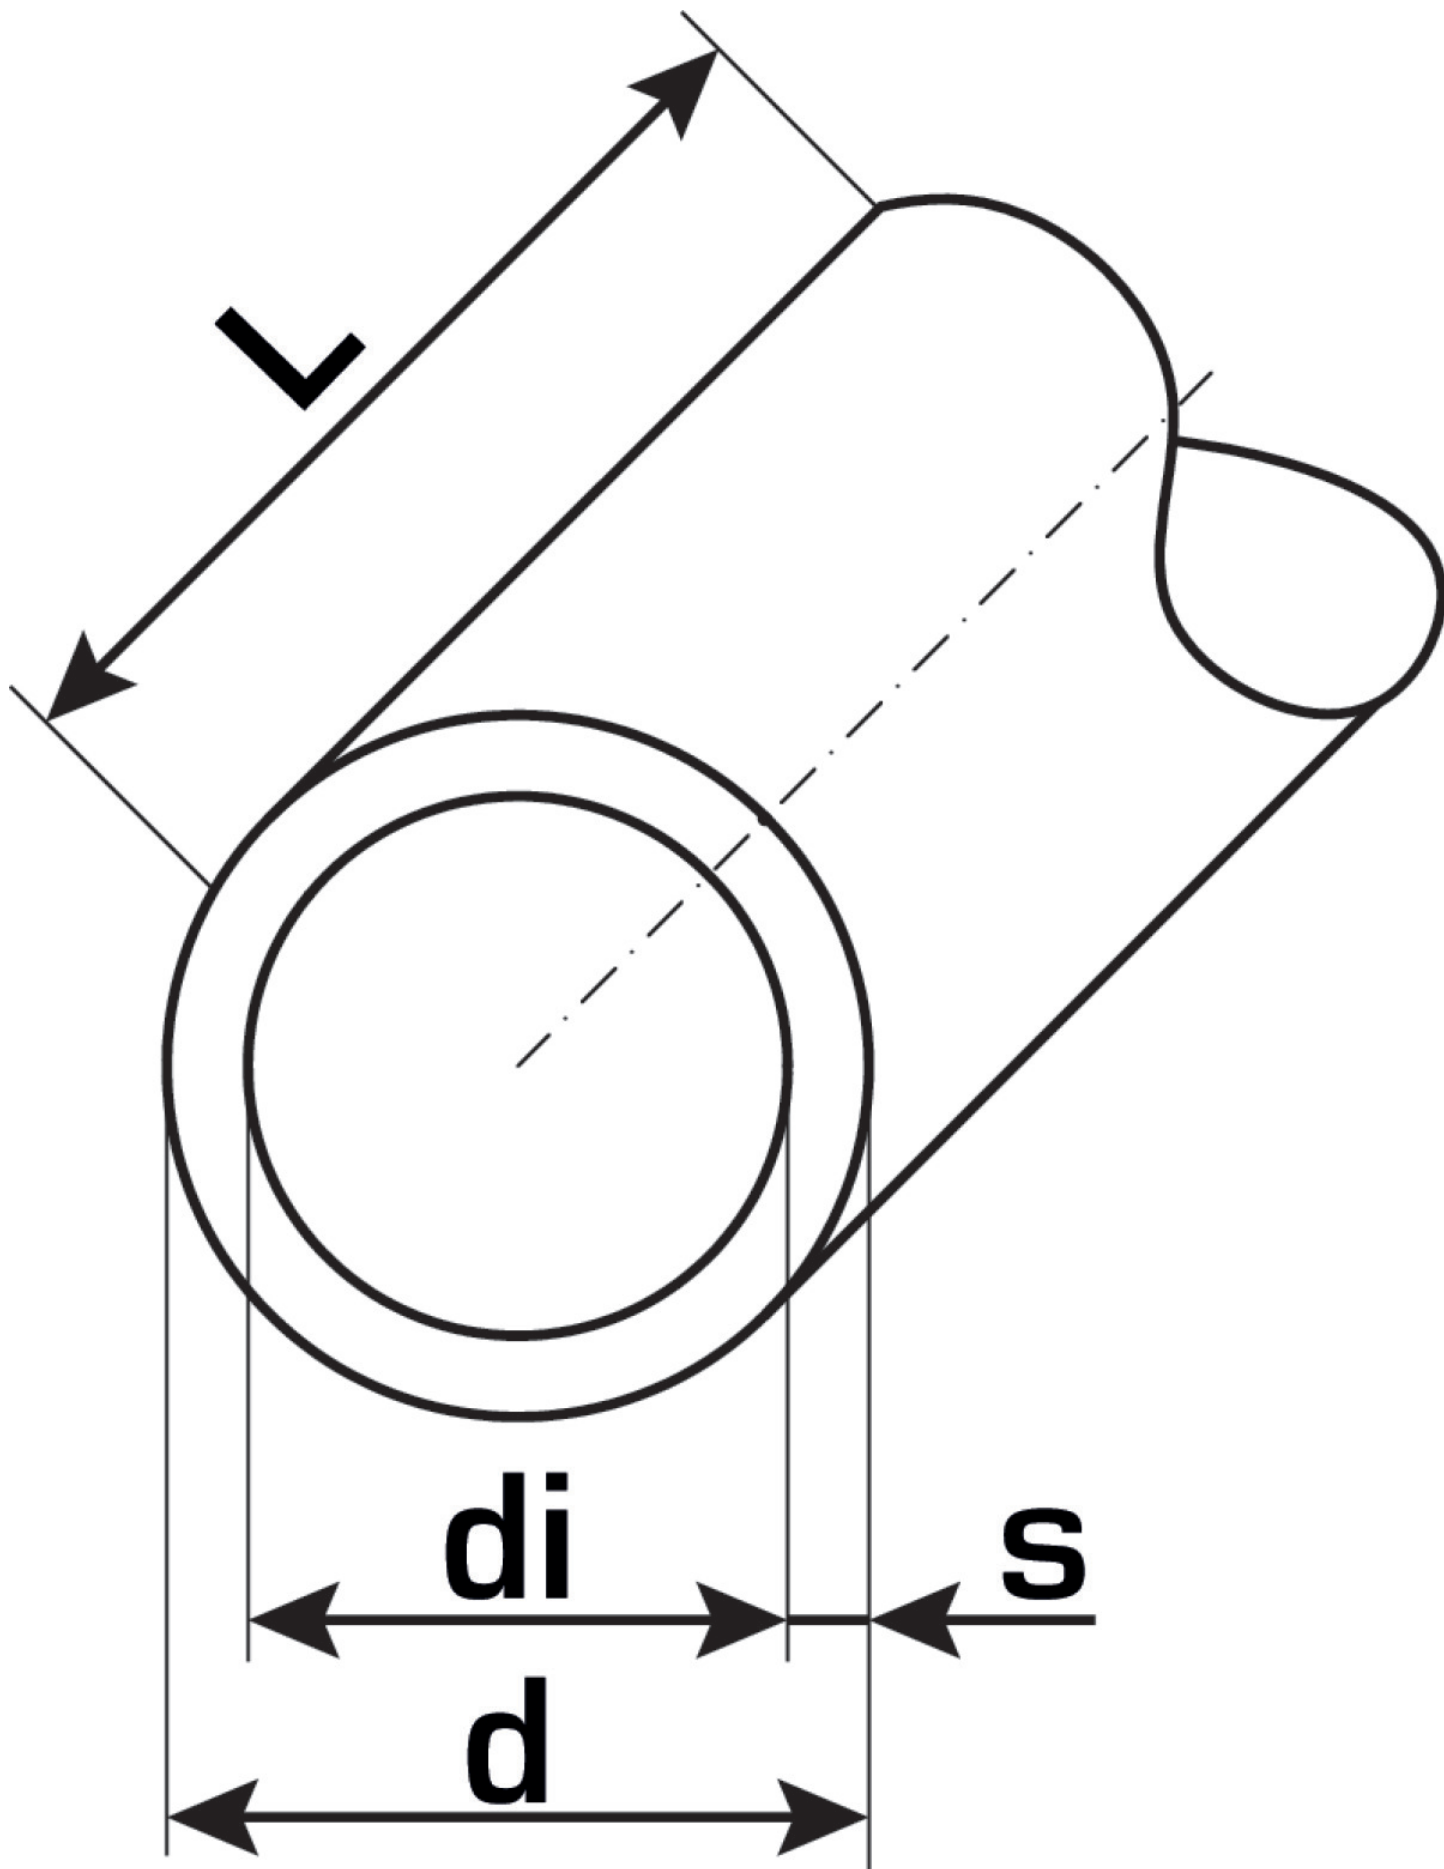

Art. No	label	d1 mm	pipe contents l/m	s mm
7032020	20x2,25	20	0.189	2.25



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com