


KELOX

KM140 KELOX pro pipe 20x2.25/28 red

1005201E

Areas of application



KELOX multilayer pipe conforming to ÖNORM EN ISO 21003; oxygen- and water vapour-tight 5-layer multilayer pipe made of PE-RT/Al/ PE-RT; 4 mm soft foam insulation applied at the factory; 4mm closed cell soft plastic insulation protective sleeve made of viscoplastic PE-HD

Classification of operating conditions according to ÖNORM EN ISO 21003

Sanitary application - Class 2: 70°C - tmax 80°C/10 bar

Radiator connection - Class 5: 80°C - tmax 90°C/10 bar

Colour: blue

Supplied in coils

Approvals:



Specifications

Article information

color White

flexible 1

Technical properties

maximum working pressure at 20 ° C 10

pipe contents 0,189 l/m

lambda pipe 0.45

Product information

VPE1 50 ROL

VPE2 450 PAL

L 50 m

weight 0,23 KGM


text KELOX pro pipe

INTRNR 39172110

main material group KELOX

material group KELOX isolierte pipes

code KM140

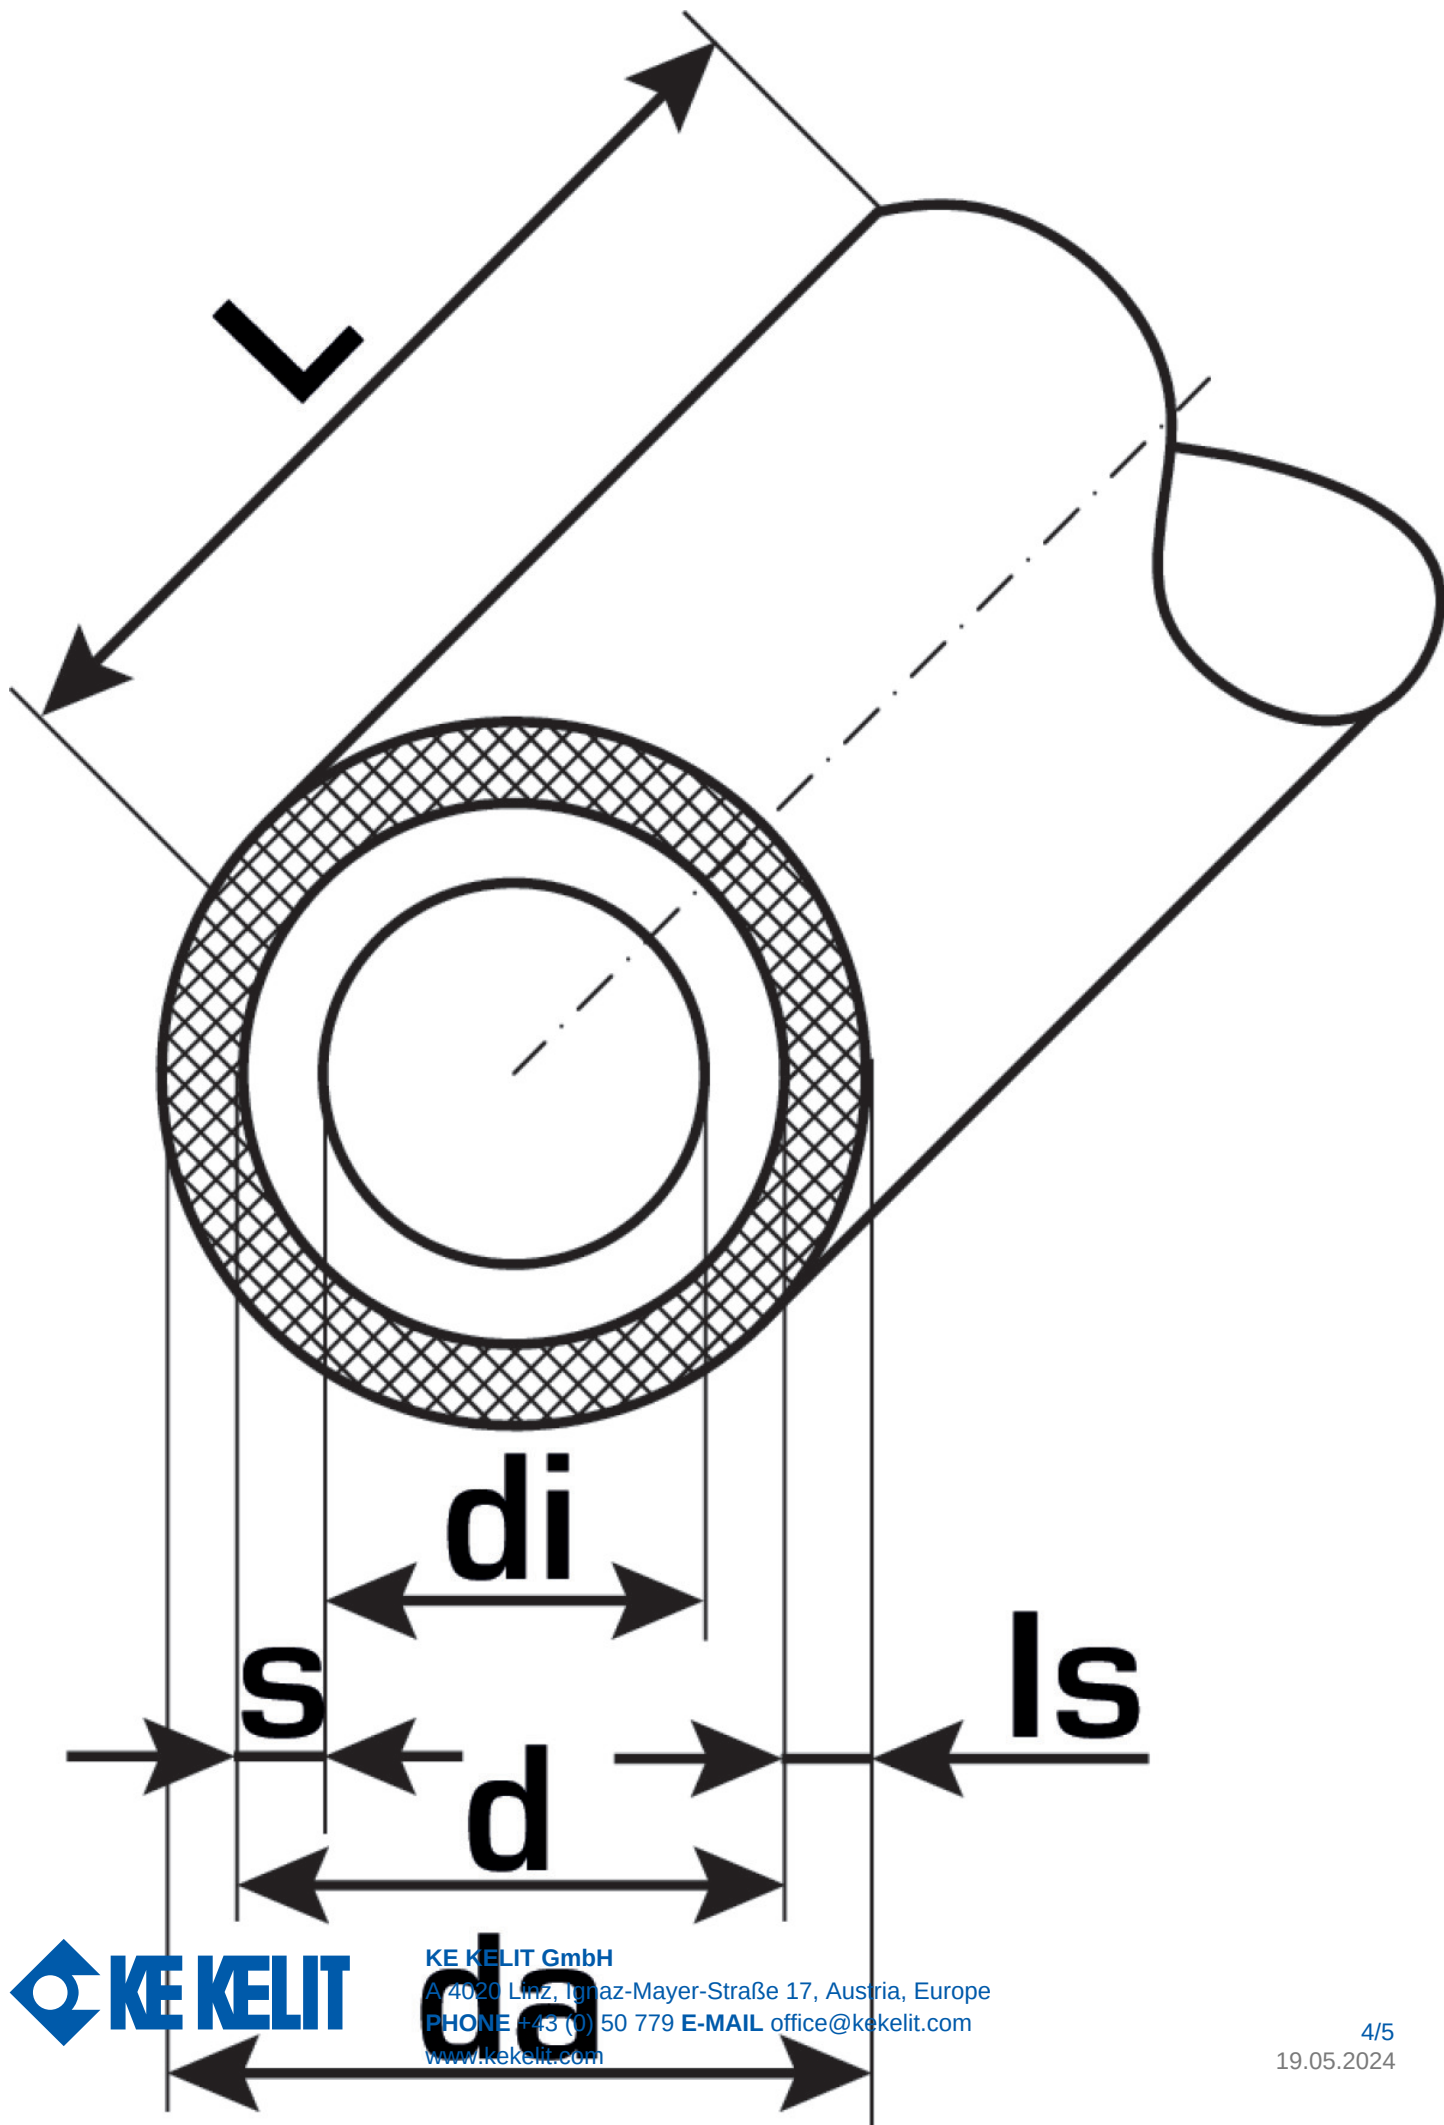

Art. No	label	pipe contents l/m
1005201E	20x2.25/28 red	0,189



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com