


# KELOX

## KWU440 KELOX-WINDOWX-U tee 40/40/40

72610GGG

### Areas of application

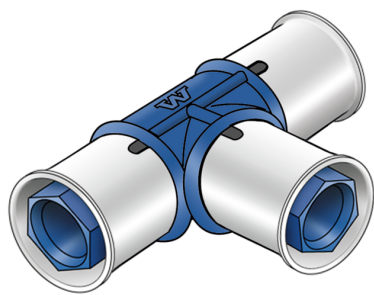

?Press tee equal or reduced, made of Windox PPSU, incl. support sleeves with O-rings and stainless steel press-fit sleeves, "leak before pressed"

### Approvals:



# Specifications

## Article information

|               |                 |
|---------------|-----------------|
| port 1        | Pressing socket |
| port 2        | Pressing socket |
| port 3        | Pressing socket |
| execution     | Tee piece       |
| angle         | 90 °            |
| press contour | U               |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                                  |
|---------------------|----------------------------------|
| VPE1                | 3 SA1                            |
| VPE2                | 9 KT1                            |
| weight              | 0.22 KGM                         |
| text                | KELOX-WINDOWX-U tee              |
| INTRNR              | 39174000                         |
| main material group | KELOX                            |
| material group      | KELOX-WINDOWX-U plastic fittings |
| code                | KWU440                           |



| Art. No  | label    | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|----------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 72610GGI | 40/40/40 | 40    | 40    | 40    | 71    | 71    | 71    | 26    | 26    | 26    |