


# KELEN

## KE36 KELEN PP-RCT tee reduced in the flow 32/32/25

2580701

### Areas of application

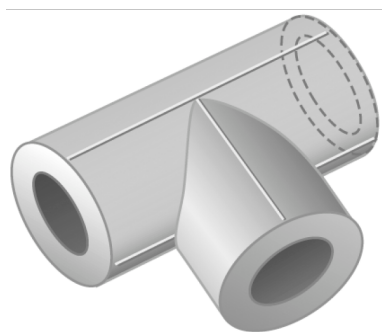

KELEN PP-RCT Polyfusion welding fitting for connecting pipes with fittings made of the same material (no reduction of internal diameter)

### Approvals:



# Specifications

## Article information


|           |                        |
|-----------|------------------------|
| port 1    | Kunststoffschweißmuffe |
| port 2    | Kunststoffschweißmuffe |
| port 3    | Kunststoffschweißmuffe |
| execution | T-Stück                |
| angle     | 90 °                   |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 20 bar |
|------------------------------------|--------|

## Product information

|                     |                                      |
|---------------------|--------------------------------------|
| VPE1                | 5 SA1                                |
| VPE2                | 30 KT1                               |
| VPE3                | 180 KT2                              |
| VPE4                | 2880 PAL                             |
| weight              | 0,096 KGM                            |
| text                | KELEN PP-RCT tee reduced in the flow |
| INTRNR              | 39174000                             |
| main material group | KELEN                                |
| material group      | KELEN plastic fittings               |
| code                | KE36                                 |

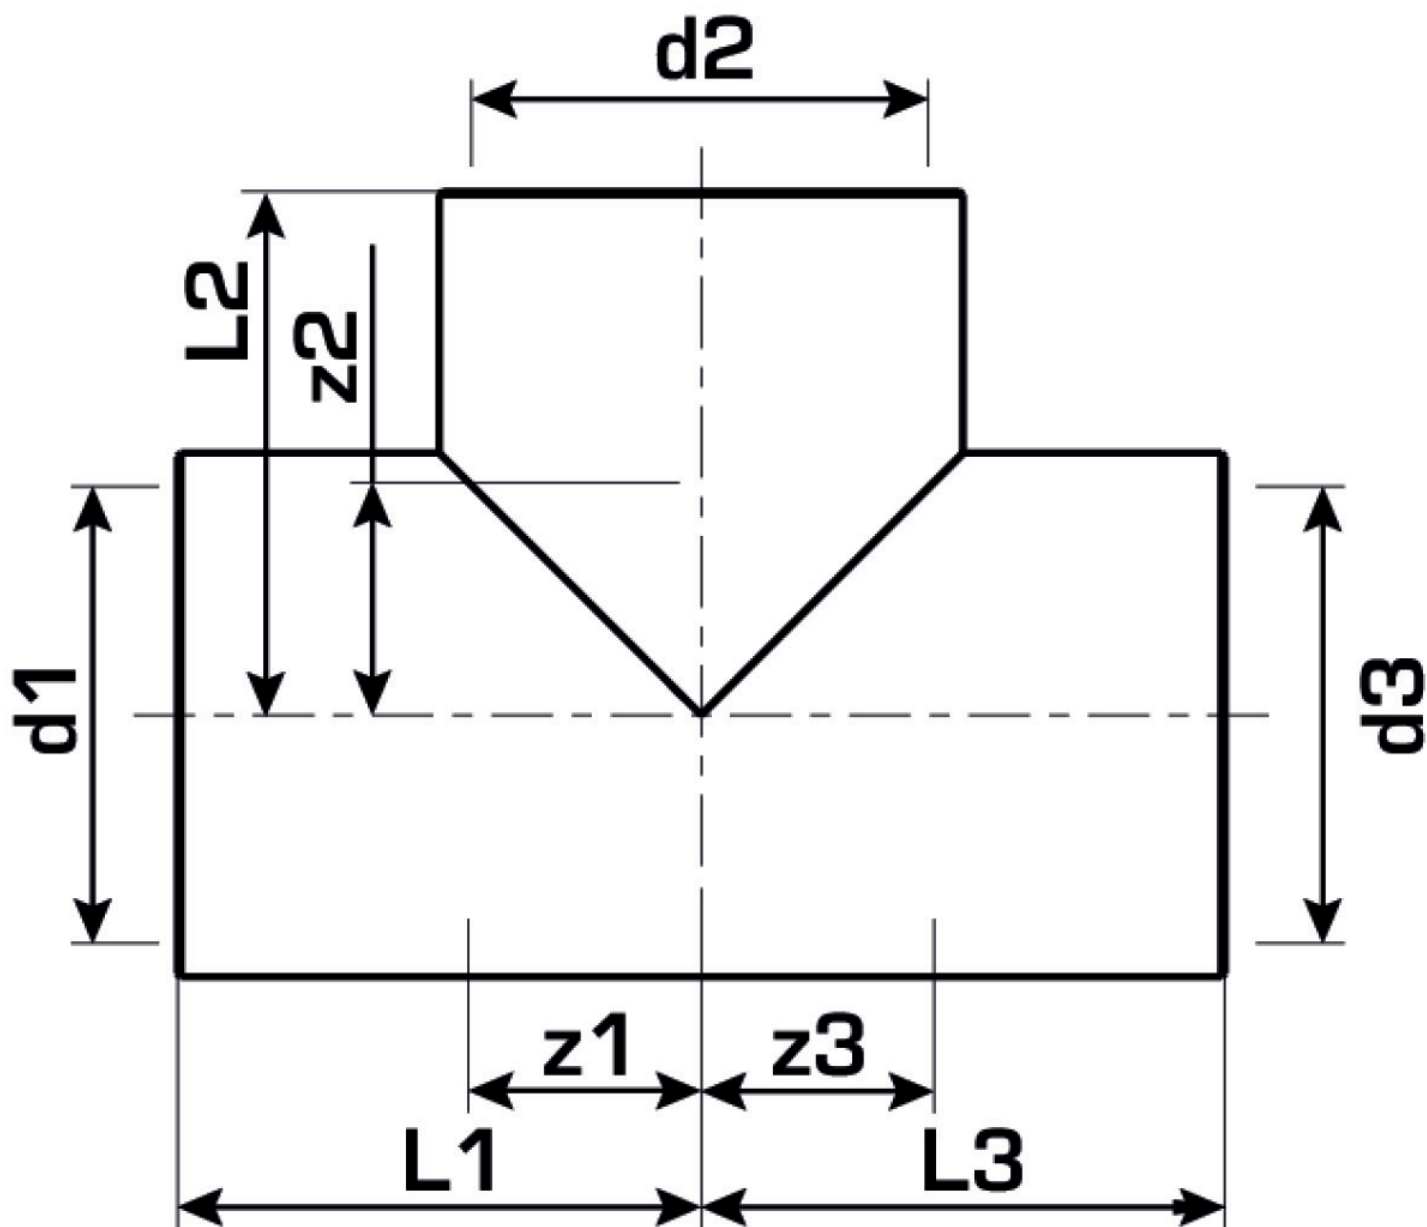

| Art. No | label    | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|---------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 2580701 | 32/32/25 | 32    | 32    | 25    | 42    | 42    | 42    | 17    | 17    | 22    |