


KELOX

KMU489 ?KELOX-ULTRAX STEELFIX adaptor 20/22

53272DD0

Areas of application

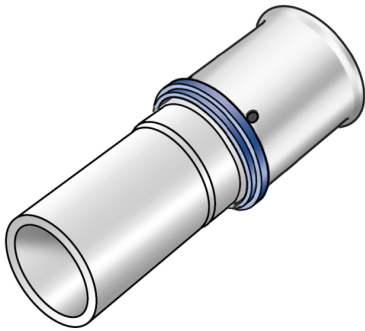

?Press-adaptor straight from Steelfix, Copperfix pipe size to KELOX-ULTRAX - press-socket made from non-porous metal-plated red brass, incl. support sleeves with O-rings and steel or stainless steel press-sleeves, d16-32mm, "leak before pressed"

ATTENTION! Connection to pipe end only suitable as a screw or press-connection!

Approvals:



Specifications

Article information


port 1	Pressing socket
execution	1-part
design	Straight
press contour	U

Technical properties

maximum working pressure at 20 ° C	10
------------------------------------	----

Product information

VPE1	10 SA1
VPE2	100 KT1
weight	0,06 KGM
text	?KELOX-ULTRAX STEELFIX adaptor
INTRNR	74122000
main material group	KELOX
material group	KELOX-ULTRAX metal fittings
code	KMU489

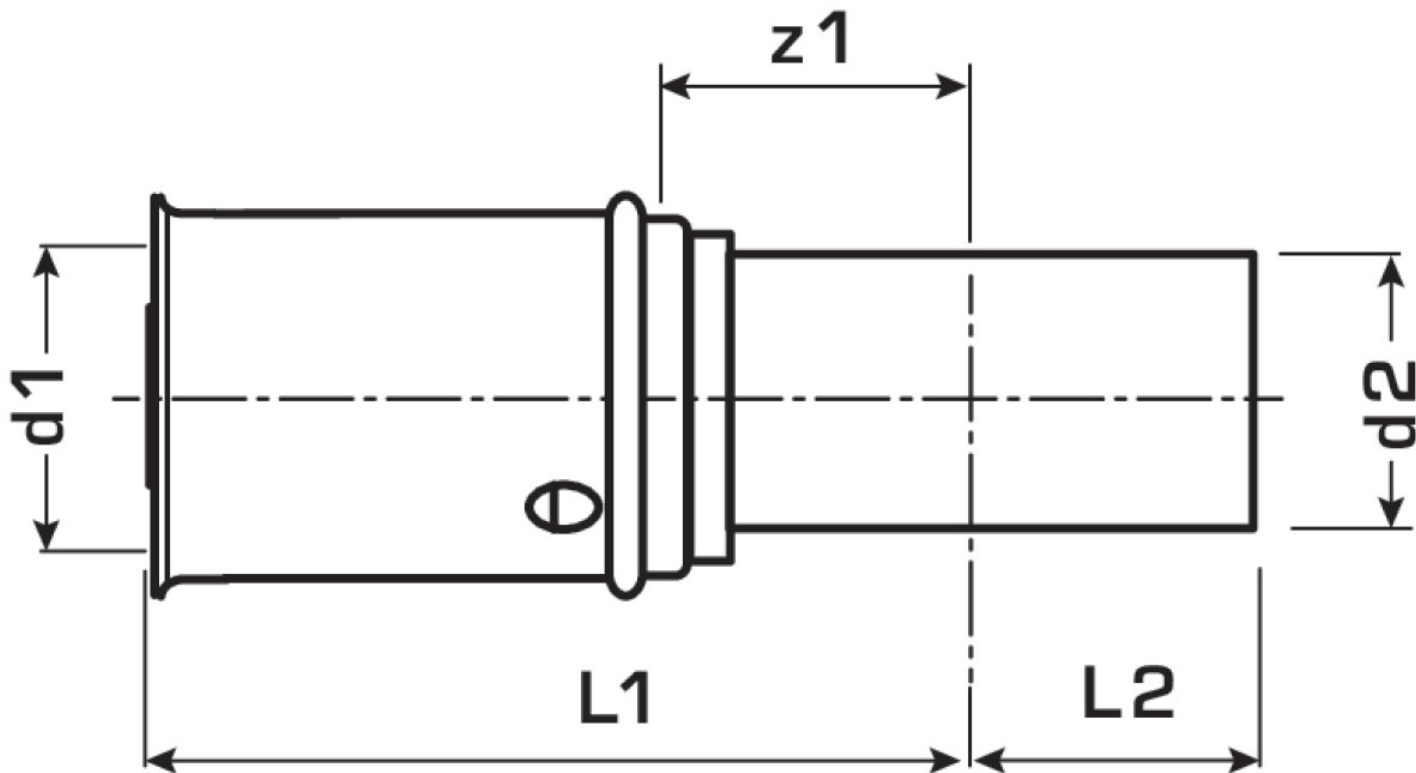

Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm	z1 mm
53272DD0	20/22	20	22	35	21	11