


# KELOX

## KM113 KELOX multilayer pipe 16x2 / 3m

74101603

### Areas of application

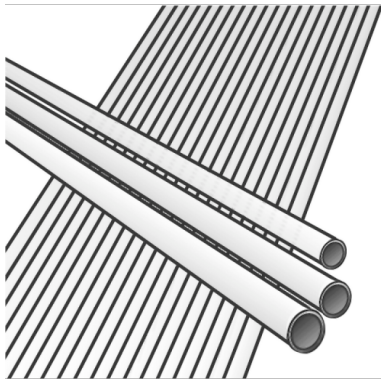

KELOX multilayer pipe conforming to ÖNORM EN ISO 21003; oxygen- and water vapour diffusion-tight 5-layer composite pipe made of PE-RT/Al/ PE-RT;

Classification of operating conditions according to ÖNORM EN ISO 21003

Sanitary application - Class 2: 70°C - tmax 80°C/10 bar

Radiator connection - Class 5: 80°C - tmax 90°C/10 bar

Colour: white/transparent

Rod length: 3m

## Approvals:



# Specifications

## Article information

color White

flexible 1

## Technical properties

maximum working pressure at 20 ° C 10

pipe weight 0.11

pipe contents 0,113 l/m

lambda pipe 0.45

wall rawness 0,007 mm

expansion coefficient 0,025 mm/(m.K)

## Product information

VPE1 75 BND

VPE2 2475 HOB

L 3 m

weight 0,11 KGM

text KELOX multilayer pipe

INTRNR 39173900

main material group KELOX

material group KELOX pipes

code KM113



| Art. No  | label     | d1 mm | pipe contents l/m | s |
|----------|-----------|-------|-------------------|---|
| 74101603 | 16x2 / 3m | 16    | 0,113             | 2 |



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)