


# KELOX

## KUC130 KELOX-ECO Plus pipe - 9mm 16x2

7091620

### Areas of application

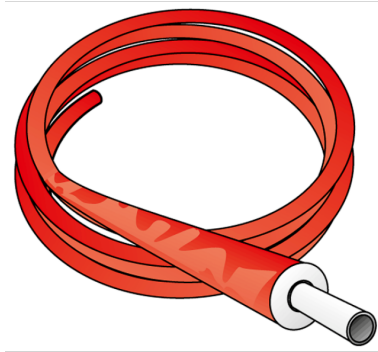

KELOX-ECO solid-wall pipe conforming to ÖNORM EN ISO 22391 made of PE-RT Type 2 with 9mm closed-cell soft foam insulation applied at the factory and plastic insulation protective sleeve made of viscoplastic PE foil. Connections can be made with KM screw fittings, KMP, KWP, KMU and KWX fittings.

Classification of operating conditions according to ÖNORM EN ISO 21003

Cold water application range: 20 °C - 10 bar

Warm water application range: 60 °C - 6 bar

Colour: red

Supplied in coils

## Approvals:



# Specifications

## Article information


|                  |       |
|------------------|-------|
| color            | White |
| colour isolation | Blue  |
| flexible         | 1     |
| trade length     | 50 m  |
| isolation        | 1     |

## Technical properties

|                                    |               |
|------------------------------------|---------------|
| maximum working pressure at 20 ° C | 10            |
| thick thermal insulation           | 9             |
| pipe weight                        | 0.18          |
| pipe contents                      | 0,113 l/m     |
| lambda pipe                        | 0.45          |
| wall rawness                       | 0,007 mm      |
| expansion coefficient              | 0,19 mm/(m.K) |

## Product information

|                     |                           |
|---------------------|---------------------------|
| VPE1                | 50 ROL                    |
| VPE2                | 700 PAL                   |
| L                   | 50 m                      |
| weight              | 0,18 KGM                  |
| text                | KELOX-ECO Plus pipe - 9mm |
| INTRNR              | 39173900                  |
| main material group | KELOX                     |
| material group      | KELOX isolierte pipes     |
| code                | KUC130                    |

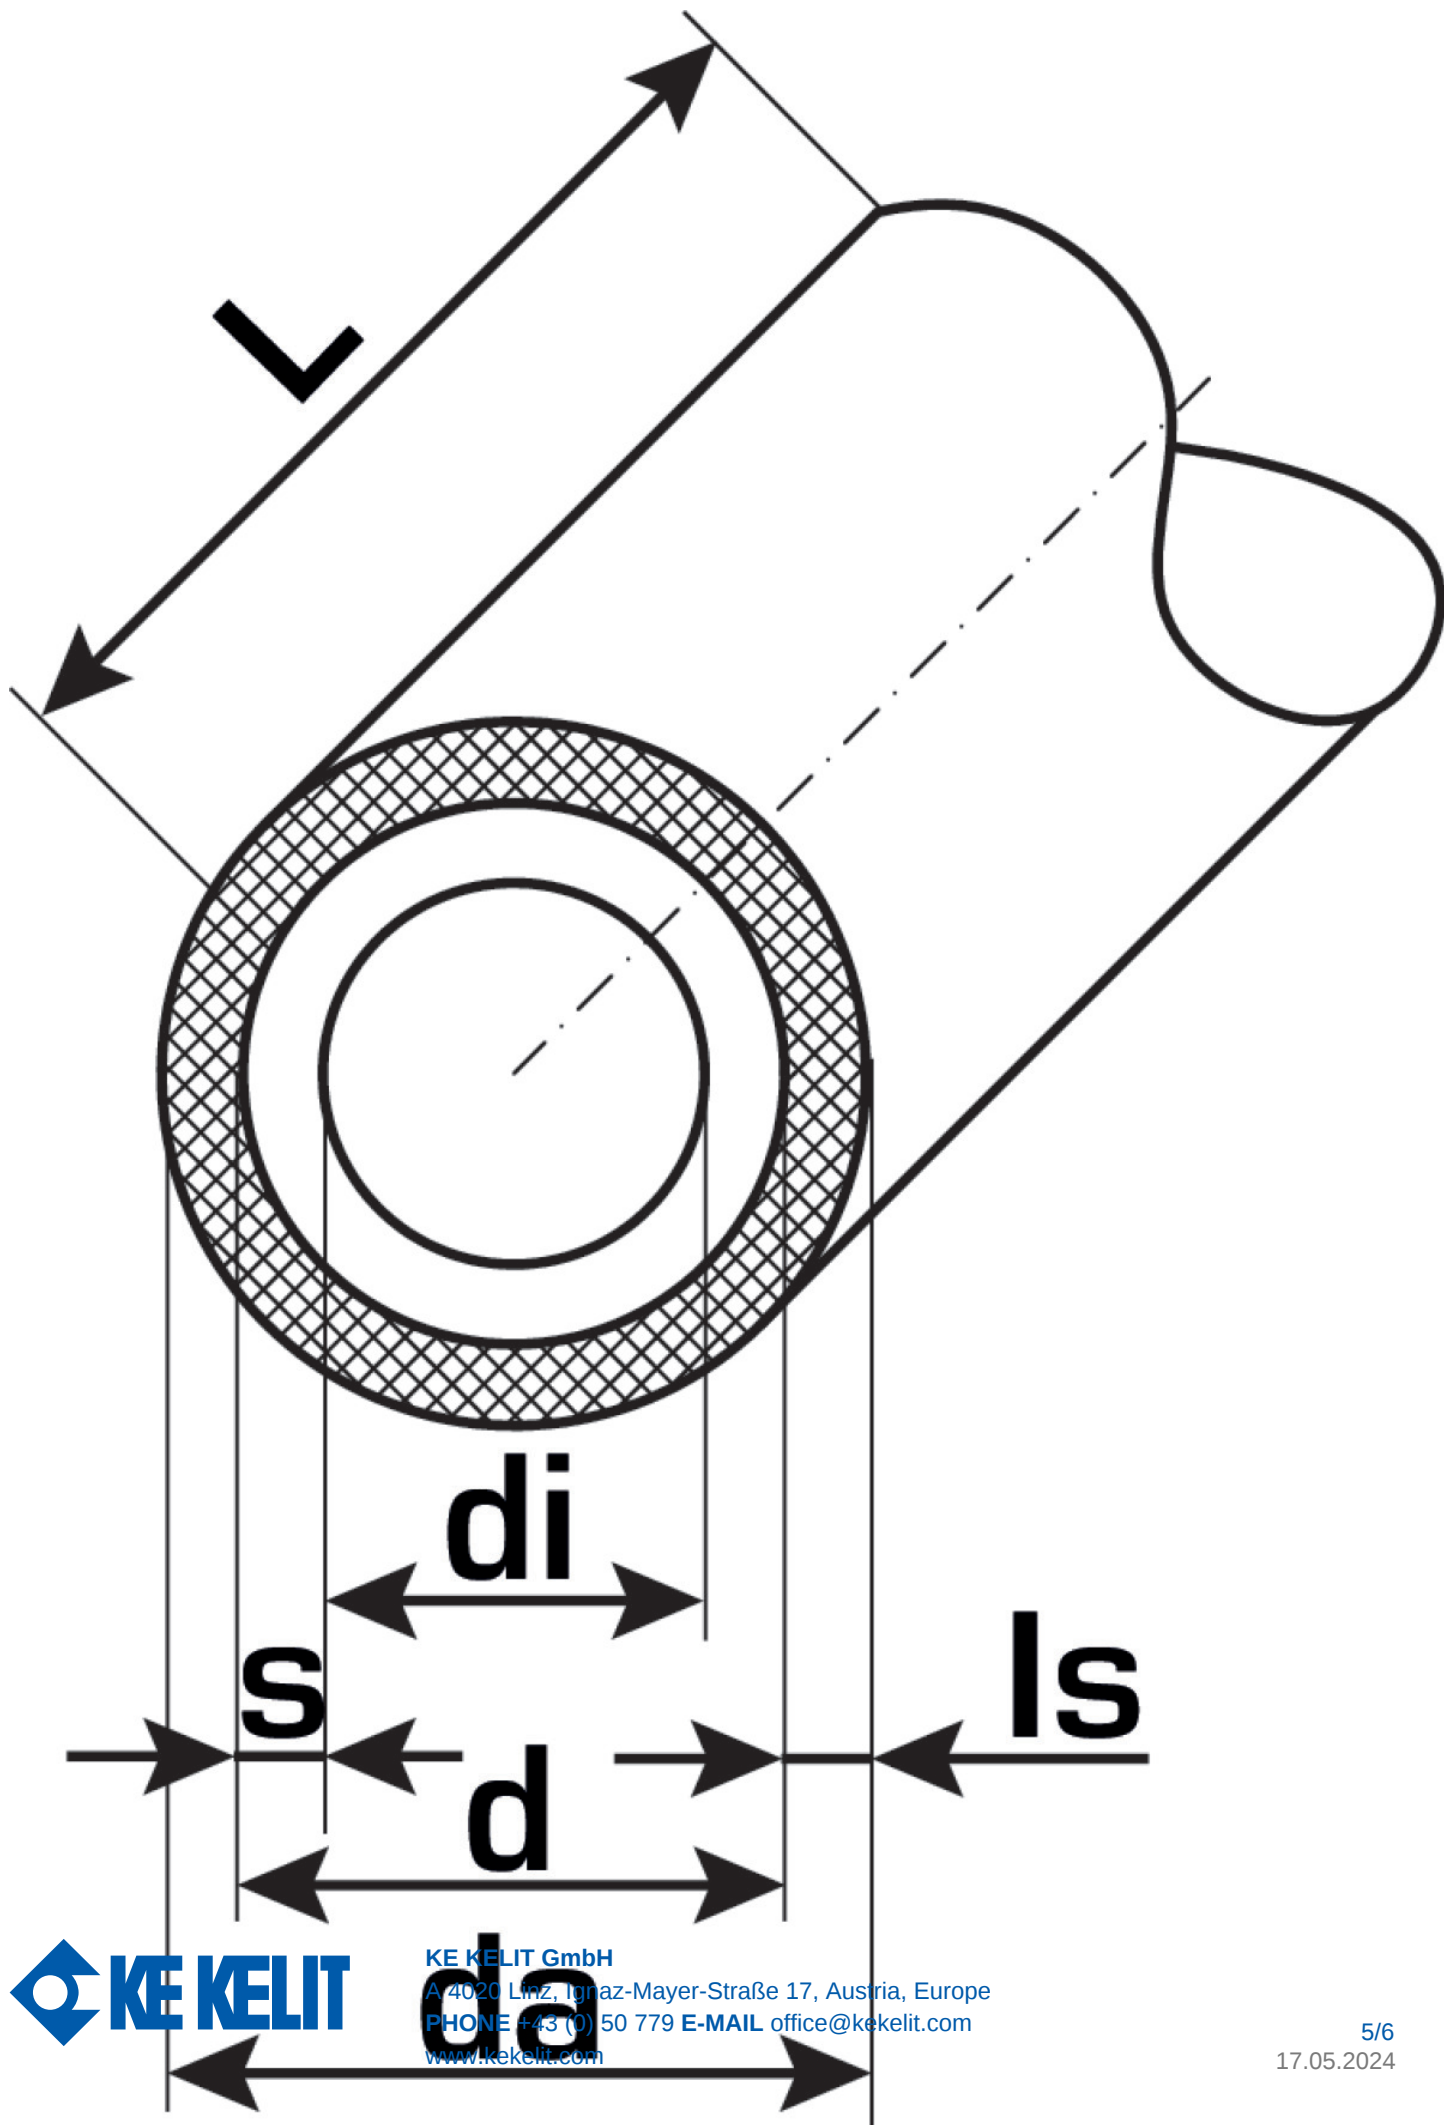

| Art. No | label | d1 mm | d Jacket tube mm | pipe contents l/m | s |
|---------|-------|-------|------------------|-------------------|---|
| 7091620 | 16x2  | 16    | 34               | 0,113             | 2 |