


# KELOX

## KMP447 KELOX-PROTEC adaptor tee female 16x1/2"

73240B02

### Areas of application

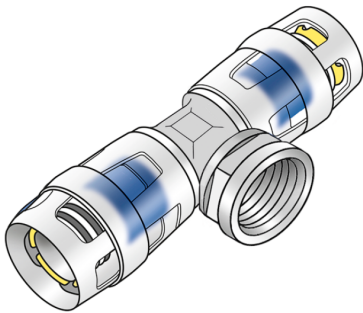

Plug-in tee piece with female thread, made of non-porous metallized brass; support sleeves, O-rings, withdrawal barriers and a protector ring as an insertion locking device

DO NOT screw in any threaded pipes and cast iron fittings!

### Approvals:



# Specifications

## Article information


|           |                      |
|-----------|----------------------|
| port 1    | Plug-in              |
| port 2    | Female thread metric |
| port 3    | Plug-in              |
| execution | Tee piece            |
| angle     | 90 °                 |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                                 |
|---------------------|---------------------------------|
| VPE1                | 10 SA1                          |
| VPE2                | 100 KT1                         |
| weight              | 0,123 KGM                       |
| text                | KELOX-PROTEC adaptor tee female |
| INTRNR              | 74122000                        |
| main material group | KELOX                           |
| material group      | KELOX-PROtec pushfittings       |
| code                | KMP447                          |

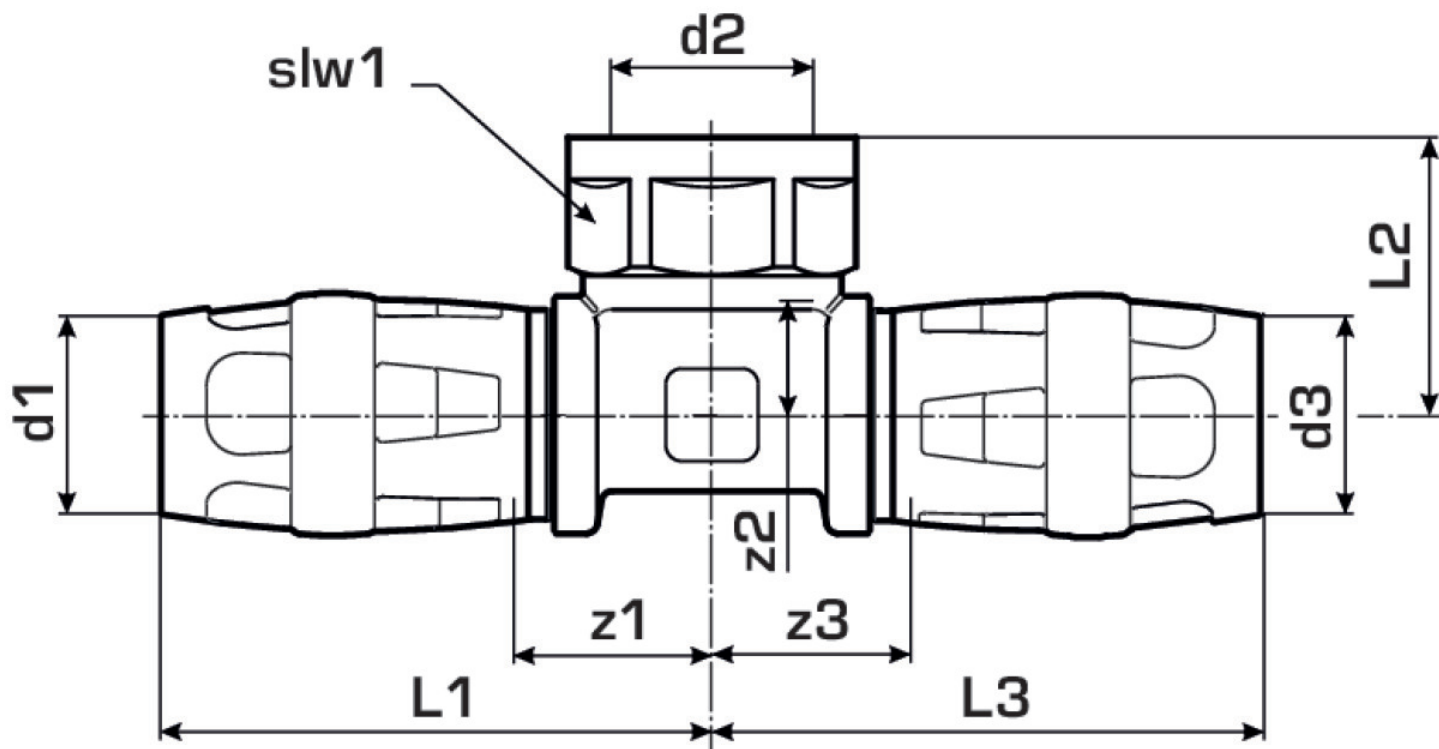

| Art. No  | label   | d2        | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm | slw1 |
|----------|---------|-----------|-------|-------|-------|-------|-------|-------|------|
| 73240B02 | 16x1/2" | 1/2" (15) | 50.5  | 26    | 50.5  | 17.5  | 12.5  | 17.5  | 24   |