


CLIMATE FIX

KCA100 CLIMATEFIX-ALOX multilayer pipe ALOX-ST

63511070

Areas of application

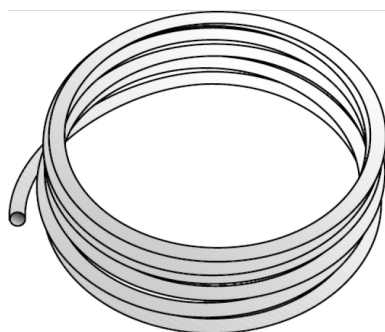

CLIMATEFIX-ALOX multilayer pipe for CLIMATEFIX KCG3 modules, oxygen- and water vapour diffusion-tight 3-layer composite pipe made from PE-RT/Al

Area of application: 50°C - tmax 60°C/6 bar

Colour: aluminium/transparent

Coiled product

ATTENTION NOT FOR DRINKING WATER!

ATTENTION compatible with KELOX PROTEC d16 only!

Specifications

Article information

color sonstige

flexible 1

isolation 0

Technical properties

maximum working pressure at 20 ° C 6 bar

pipe contents 0,113 l/m

lambda pipe 0,085 W/(m.K)

wall rawness 0,007 mm

expansion coefficient 0,025 mm/(m.K)

Product information

VPE1 700 ROL

VPE2 4200 PAL

L 700 m

weight 0,085 KGM

text CLIMATEFIX-ALOX multilayer pipe

INTRNR 39172390

main material group CLIMATEFIX

material group CLIMATEFIX fittings

code KCA100



Art. No	label	d1 mm	pipe contents l/m	s mm
63511070	ALOX-ST	15,2	0,113	1,6